

Materials Library

Functional materials that look the part

Prepared 07.04.2020



Everything You Need to Start Printing




FORM 3 BASIC PACKAGE

All of the essentials to set up a 3D printing workflow with the Form 3.

Includes

1 Form 3 3D Printer	1 Resin Tank
1 Build Platform	1 Finish Kit
PreForm Software	1 Year Warranty

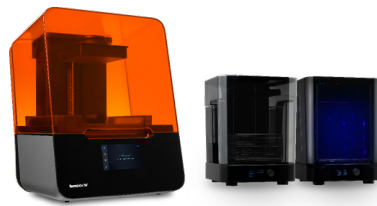


FORM 3 COMPLETE PACKAGE

An end-to-end printing and post-processing package with the support you need to print successfully.

Includes

1 Form 3 3D Printer	1 Resin Tank
1 Build Platform	1 Finish Kit
PreForm Software	1 Year Warranty
1 Form Wash	1 Form Cure
1 L Standard Resin	1 Year Pro Service Plan

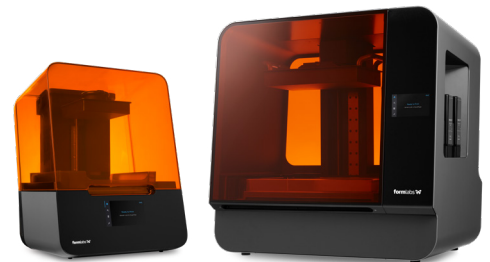


COMPANY SOLUTIONS

A team of Formlabs experts will help you discover and implement new ways to work better with 3D printing.

The Formlabs consulting team has unmatched expertise in solving technical and business challenges with stereolithography (SLA) 3D printers.

Exceptional Print Quality

Formlabs 3D printers deliver professional-quality printed parts at a fraction of the price.



HOBBYIST FDM ¹

Part Cost \$0.41


Machine Cost \$2,500



DESKTOP SLA (FORM 2) ^{1,2}

Part Cost \$1.67

Machine Cost \$3,499



INDUSTRIAL SLA ¹

Part Cost \$6.00

Machine Cost \$300,000

¹ All parts printed at 100 micron layer height. ² Printed in Formlabs Grey Resin – one of our Standard prototyping resins.

Resin Material List

RESIN	MICRON LAYER HEIGHT	FEATURES & APPLICATIONS	
STANDARD			
Clear	100 µm, 50 µm, 25 µm	<ul style="list-style-type: none"> Polishes to transparency Internal channels 	<ul style="list-style-type: none"> Working with light Semi-gloss surface
White	100 µm, 50 µm	<ul style="list-style-type: none"> Opaque Matte surface 	<ul style="list-style-type: none"> Great for large, smooth surfaces
Grey	160 µm, 100 µm, 50 µm, 25 µm	<ul style="list-style-type: none"> Opaque Matte surface 	<ul style="list-style-type: none"> Show details well without primer
Black	100 µm, 50 µm, 25 µm	<ul style="list-style-type: none"> Opaque Matte surface 	<ul style="list-style-type: none"> Show details well without primer
Color Kit	100 µm, 50 µm, 25 µm	<ul style="list-style-type: none"> Opaque Matte surface 	<ul style="list-style-type: none"> Colorful parts without requiring painting
Draft	300 µm	<ul style="list-style-type: none"> Rapid prototyping Speeds up design iterations 	<ul style="list-style-type: none"> Suitable for printing large parts quickly
ENGINEERING			
			* May not be available in all regions
Rigid	100 µm, 50 µm	<ul style="list-style-type: none"> Thin wall parts Jigs, fixtures, and tooling 	<ul style="list-style-type: none"> Electrical casings and automotive housings Turbines and fan blades
Grey Pro	100 µm, 50 µm	<ul style="list-style-type: none"> Form and fit testing Mold masters for plastics and silicones 	<ul style="list-style-type: none"> Snap fits Jigs and fixtures for manufacturing
Tough 2000	100 µm, 50 µm	<ul style="list-style-type: none"> Strong and stiff prototypes 	<ul style="list-style-type: none"> Sturdy jigs and fixtures ABS-like strength and stiffness
Tough 1500	100 µm, 50 µm	<ul style="list-style-type: none"> Springy prototypes and assemblies Snap fit and press fit connectors 	<ul style="list-style-type: none"> Polypropylene-like strength and stiffness
Durable	100 µm, 50 µm	<ul style="list-style-type: none"> Squeezable prototypes Impact resistant jigs 	<ul style="list-style-type: none"> Low friction and non-degrading surfaces Polyethylene-like strength and stiffness
Flexible 80A	100 µm, 50 µm	<ul style="list-style-type: none"> Wearables prototyping Stretchable enclosures 	<ul style="list-style-type: none"> Soft tissue anatomy
Elastic 50A	100 µm	<ul style="list-style-type: none"> Handles, grips, and overmolds Seals, gaskets, and masks 	<ul style="list-style-type: none"> Cushioning and damping Soft tissue anatomy silicone-like flexibility
High Temp	100 µm, 50 µm, 25 µm	<ul style="list-style-type: none"> Mold prototyping Heat-resistant fixtures 	<ul style="list-style-type: none"> Low pressure fluidics Environmental testing
MEDICAL			
BioMed Clear	100 µm	<ul style="list-style-type: none"> Biocompatible - Long term use USP Class VI certified 	<ul style="list-style-type: none"> Rigid, clear prints for end use medical, pharmaceutical, and industrial devices Compatible with common disinfection and sterilization methods
BioMed Amber	100 µm, 50 µm	<ul style="list-style-type: none"> Biocompatible - Short term use 	<ul style="list-style-type: none"> Rigid, translucent prints for medical or industrial uses Compatible with common disinfection and sterilization methods

RESIN	MICRON LAYER HEIGHT	FEATURES & APPLICATIONS	
DENTISTRY			* May not be available in all regions
Custom Tray	200 µm	<ul style="list-style-type: none"> • Biocompatible - Temporary use 	<ul style="list-style-type: none"> • Prints impression trays
Temporary CB	50 µm	<ul style="list-style-type: none"> • Biocompatible - Permanent use (up to 1 year in the mouth) • Compatible with temporary cements 	<ul style="list-style-type: none"> • Prints temporary crowns, bridges, inlays, onlays, and veneers • Polishes to a high gloss finish with conventional dental composite polishers
Surgical Guide	50 µm	<ul style="list-style-type: none"> • Biocompatible - Temporary use 	<ul style="list-style-type: none"> • Prints surgical and pilot drill guides
Dental LT Clear V2	100 µm	<ul style="list-style-type: none"> • Biocompatible - Permanent use 	<ul style="list-style-type: none"> • Color corrected to remove yellowness and polishes to high optical transparency • Prints splints, retainers, and other orthodontic devices
Dental LT Clear V1	100 µm	<ul style="list-style-type: none"> • Biocompatible - Permanent use 	<ul style="list-style-type: none"> • Polishes to high optical transparency • Prints splints, and other orthodontic devices
Denture Base + Teeth	50 µm	<ul style="list-style-type: none"> • Biocompatible - Permanent use • 3D print final dentures and try-ins orthodontic devices 	<ul style="list-style-type: none"> • The first truly accessible direct printed dental prosthetic
Model	140 µm (Form 2), 100 µm, 50 µm, 25 µm	<ul style="list-style-type: none"> • Matte surface • Prints crown and bridge models with removable dies 	<ul style="list-style-type: none"> • Contacts within ± 35 µm • Crisp margins

JEWELRY			
Castable Wax	50 µm, 25 µm	<ul style="list-style-type: none"> • Crisp settings, sharp prongs, smooth shanks, fine surface detail 	<ul style="list-style-type: none"> • 20% wax-filled photopolymer • No post-curing required
Castable	100 µm, 50 µm, 25 µm	<ul style="list-style-type: none"> • This pure polymer requires an alternate burnout from a typical wax schedule. 	<ul style="list-style-type: none"> • Designed for investment casting

FORM X + PARTNERSHIP			* May not be available in all regions
Ceramic	50 µm, 25 µm	<ul style="list-style-type: none"> • Technical experimentation 	<ul style="list-style-type: none"> • Research and development
Rebound	200 µm	<ul style="list-style-type: none"> • End-use production • Gaskets, seals, and grommets • Compliant robotics 	<ul style="list-style-type: none"> • Custom cases • Handles, grips, and overmolds • Complex geometries

Standard

Materials for High-Resolution Rapid Prototyping

High Resolution. For demanding applications, our carefully-engineered resins capture the finest features in your model.

Strength and Precision. Our resins create accurate and robust parts, ideal for rapid prototyping and product development.

Surface Finish. Perfectly smooth right out of the printer, parts printed on the Formlabs stereolithography printers have the polish and finish of a final product.



V4 CLEAR
FLGPCLO4

V4 WHITE
FLGPWH04

V4 GREY
FLGPGR04

V4 BLACK
FLGPBL04

V4 COLOR
FLGPCB01

Prepared 04 . 19 . 2016
Rev 01 04 . 18 . 2017

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

Material Properties Data

The following material properties are comparable for Clear Resin, White Resin, Grey Resin, Black Resin, and Color Kit.

	METRIC ¹		IMPERIAL ¹		METHOD
	Green ²	Post-Cured ³	Green ²	Post-Cured ³	
Tensile Properties					
Ultimate Tensile Strength	38 MPa	65 MPa	5510 psi	9380 psi	ASTM D 638-10
Tensile Modulus	1.6 GPa	2.8 GPa	234 ksi	402 ksi	ASTM D 638-10
Elongation at Failure	12 %	6 %	12 %	6 %	ASTM D 638-10
Flexural Properties					
Flexural Modulus	1.3 GPa	2.2 GPa	181 ksi	0.5 ksi	ASTM D 790-10
Impact Properties					
Notched IZOD	16 J/m	25 J/m	0.3 ft-lbf/in	0.46 ft-lbf/in	ASTM D 256-10
Temperature Properties					
Heat Deflection Temp. @ 264 psi	42.7 °C	58.4 °C	108.9 °F	137.1 °F	ASTM D 648-07
Heat Deflection Temp. @ 66 psi	49.7 °C	73.1 °C	121.5 °F	163.6 °F	ASTM D 648-07

¹Material properties can vary with part geometry, print orientation, print settings, and temperature.

²Data was obtained from green parts, printed using Form 2, 100 µm, Clear settings, washed and air dried without post cure.

³Data was obtained from parts printed using Form 2, 100 µm, Clear settings, and post-cured with 1.25 mW/cm² of 405 nm LED light for 60 minutes at 60 °C.

Solvent Compatibility

Percent weight gain over 24 hours for a printed and post-cured 1 x 1 x 1 cm cube immersed in respective solvent:

Solvent	24 Hour Weight Gain (%)	Solvent	24 Hour Weight Gain (%)
Acetic Acid, 5 %	< 1	Hydrogen Peroxide (3 %)	< 1
Acetone	sample cracked	Isooctane	< 1
Isopropyl Alcohol	< 1	Mineral Oil, light	< 1
Bleach, ~5 % NaOCl	< 1	Mineral Oil, heavy	< 1
Butyl Acetate	< 1	Salt Water (3.5 % NaCl)	< 1
Diesel	< 1	Sodium hydroxide (0.025 %, pH = 10)	< 1
Diethyl glycol monomethyl ether	1.7	Water	< 1
Hydraulic Oil	< 1	Xylene	< 1
Skydrol 5	1	Strong Acid (HCl Conc)	distorted

HIGH RESOLUTION

For demanding applications, our carefully-engineered resins capture the finest features in your model.

STRENGTH AND PRECISION

Our resins create accurate and robust parts, ideal for our rapid prototyping and product development.

SURFACE FINISH

Perfectly smooth right out of the printer, parts printed on Formlabs printers have the polish and finish of a final product.



CLEAR

Our Clear Resin polishes to near optical transparency, making it ideal for showcasing internal features.

WHITE

Our White Resin emphasizes fine details and has a matte finish with a warm, slightly ivory color.

GREY

Our Grey Resin has a smooth, matte finish and shows details beautifully without primer.

BLACK

Our Black Resin's opaque matte finish rivals the look of injection-molded plastics, capable of producing incredible looks-like prototypes.



COLOR KIT

Color Kit contains a Color Base cartridge and five Color Pigments. Use Color Kit to mix and print matte, opaque parts in a range of colors without the manual work of finishing and painting.

STANDARD RESIN

Draft

Draft Resin for Truly Rapid Prototyping

Draft Resin prints up to four times faster than Formlabs standard materials, making it ideal for initial prototypes and rapid iterations to help bring products to market faster. Parts printed with Draft Resin exhibit a smooth grey finish and high accuracy. Use 200 micron settings for fast print speeds, or use 100 micron settings for models with finer details.

Initial prototypes

Live 3D printing demos

Rapid design iterations

High throughput applications



V2

FLDRGR02

formlabs 

Prepared 10 . 07 . 2020
Rev 01 10 . 07 . 2020

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

DRAFT MATERIAL PROPERTIES DATA

	METRIC ¹			IMPERIAL ¹			METHOD
	Green ²	Post-Cured at Room Temperature ³	Post-Cured at 60 °C ⁴	Green ²	Post-Cured at Room Temperature ³	Post-Cured at 60 °C ⁴	
Tensile Properties							
Ultimate Tensile Strength	24 MPa	36 MPa	52 MPa	3481 psi	5221 psi	7542 psi	ASTM D638-14
Tensile Modulus	0.8 GPa	1.7 GPa	2.3 GPa	122 ksi	247 ksi	334 ksi	ASTM D638-14
Elongation at Break	14%	5%	4%	14%	5%	4%	ASTM D638-14
Flexural Properties							
Flexural Modulus	0.6 GPa	1.8 GPa	2.3 GPa	87 ksi	261 ksi	334 ksi	ASTM D790-17
Impact Properties							
Notched IZOD	26 J/m	29 J/m	26 J/m	0.5 ft-lbf/in	0.5 ft-lbf/in	0.5 ft-lbf/in	ASTM D256-10
Temperature Properties							
Heat Deflection Temp. @ 1.8 MPa	37 °C	44 °C	57 °C	99 °F	111 °F	135 °F	ASTM D648-18
Heat Deflection Temp. @ 0.45 MPa	43 °C	53 °C	74 °C	109 °F	127 °F	165 °F	ASTM D648-18

¹ Material properties may vary with part geometry, print orientation and temperature.

² Data was obtained from green parts, printed using a Form 3, 200 micron, Draft v2 Resin settings, washed in Form Wash and air dried without post cure.

³ Data was obtained from parts printed using a Form 3, 200 micron, Draft v2 Resin settings and post-cured with a Form Cure at Room Temperature for 5 minutes.

⁴ Data was obtained from parts printed using a Form 3, 200 micron, Draft v2 Resin settings, and post-cured with Form Cure at 60°C for 5 minutes.

Solvent Compatibility

Percent weight gain over 24 hours for a printed and post-cured 1 x 1 x 1 cm cube immersed in respective solvent:

Solvent	24 hr weight gain, %	Solvent	24 hr weight gain, %
Acetic Acid 5%	0.18	Mineral oil (Heavy)	< 0.10
Acetone	4.24	Mineral oil (light)	< 0.10
Bleach ~5% NaOCl	0.14	Salt Water (3.5% NaCl)	0.34
Butyl Acetate	0.11	Skydrol 5	0.31
Diesel Fuel	0.10	Sodium Hydroxide solution (0.025% PH 10)	0.28
Diethyl glycol Monomethyl Ether	0.77	Strong Acid (HCl conc)	< 0.10
Hydraulic Oil	< 0.10	TPM	0.29
Hydrogen peroxide (3%)	0.23	Water	< 0.10
Isooctane (aka gasoline)	< 0.10	Xylene	< 0.10
Isopropyl Alcohol	< 0.10		


MATERIALS LIBRARY

Engineering

Materials for Engineering, Manufacturing, and Product Design

Our library of versatile, reliable Engineering Resins is formulated to help you reduce costs, iterate faster, and bring better experiences to market.

* May not be available in all regions

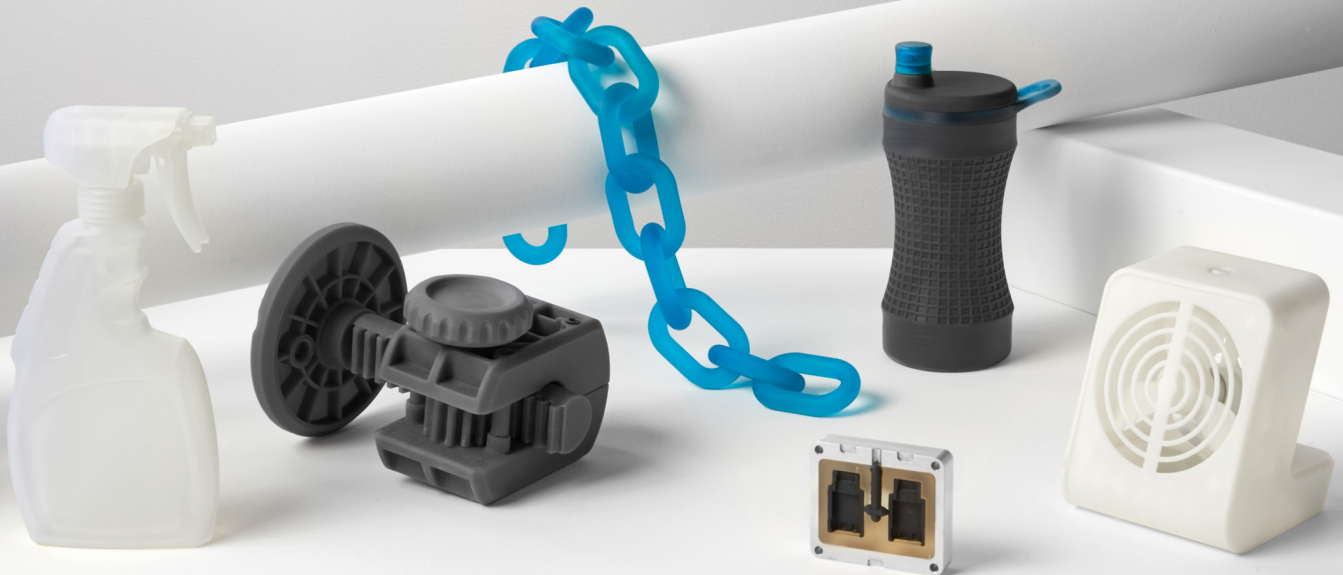

ENGINEERING RESIN

Grey Pro

Grey Pro Resin for Versatile Prototyping


Grey Pro Resin offers high precision, moderate elongation, and low creep. This material is great for concept modeling and functional prototyping, especially for parts that will be handled repeatedly.

Form and fit testing

Injection molded product prototypes

Mold masters for plastics, and silicones

Jigs and fixtures for manufacturing

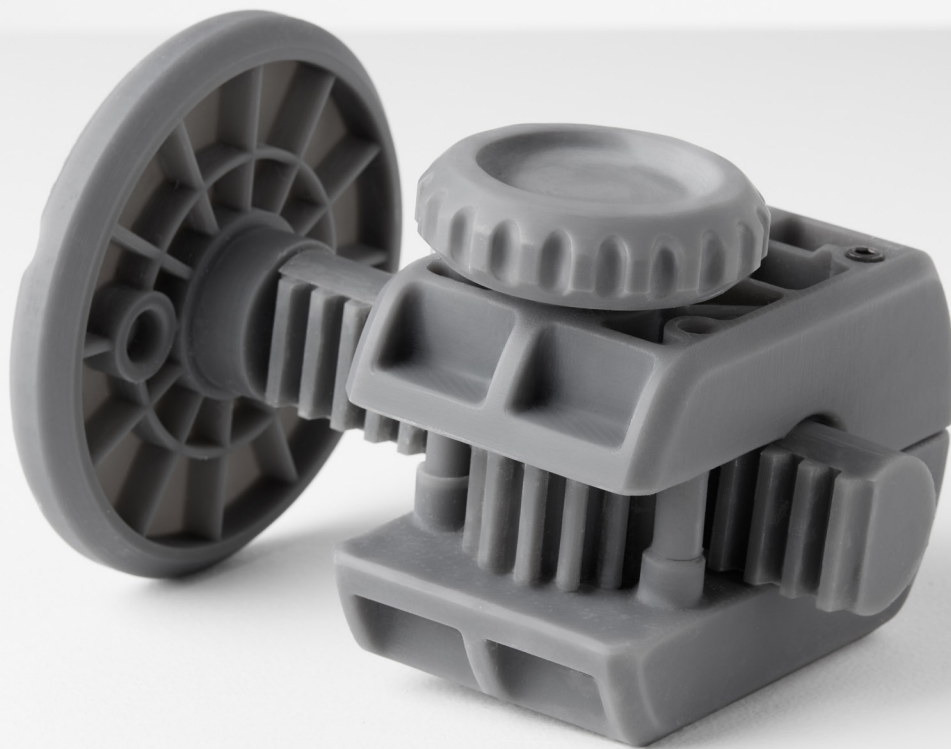

FLPRGR01

formlabs 

Prepared 01 . 22 . 2018
Rev 01 01 . 22 . 2018

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

Material Properties Data

	METRIC ¹		IMPERIAL ¹		METHOD
	Green ²	Post-Cured ³	Green ²	Post-Cured ³	
Tensile Properties					
Ultimate Tensile Strength	33 MPa	61 MPa	5076 psi	8876 psi	ASTM D 638-14
Tensile Modulus	1.4 GPa	2.6 GPa	203 ksi	377 ksi	ASTM D 638-14
Elongation	33 %	13 %	33 %	13 %	ASTM D 638-14
Flexural Properties					
Flexural Stress at 5% Strain	39 MPa	86 MPa	5598 psi	12400 psi	ASTM D 790-15
Flexural Modulus	0.9 GPa	2.2 GPa	136 ksi	319 ksi	ASTM D 790-15
Impact Properties					
Notched IZOD	not tested	18.7 J/m	not tested	0.351 ft-lbf/in	ASTM D256-10
Temperature Properties					
Heat Deflection Temp. @ 1.8 MPa	not tested	62.4 C	not tested	144.3 °F	ASTM D 648-16
Heat Deflection Temp. @ 0.45 MPa	not tested	77.5 C	not tested	171.5 °F	ASTM D 648-16
Thermal Expansion (-30 to 30° C)	not tested	78.5 um/m/C	not tested	43.4 µin/in/°F	ASTM E 831-13

¹Material properties can vary with part geometry, print orientation, print settings, and temperature.

²Data was obtained from green parts, printed using Form 2, 100 µm, Grey Pro settings, washed and air dried without post cure.

³Data was obtained from parts printed using Form 2, 100 µm, Grey Pro settings, and post-cured with a Form Cure for 120 minutes at 80 °C.

Solvent Compatibility

Percent weight gain over 24 hours for a printed and post-cured 1 x 1 x 1 cm cube immersed in respective solvent:

Solvent	24 Hour Weight Gain (%)	Solvent	24 Hour Weight Gain (%)
Acetic Acid, 5 %	<1	Hydrogen Peroxide (3 %)	<1
Acetone	10.8	Isooctane	<1
Isopropyl Alcohol	1.6	Mineral Oil, light	<1
Bleach, ~5 % NaOCl	<1	Mineral Oil, heavy	<1
Butyl Acetate	<1	Salt Water (3.5 % NaCl)	<1
Diesel	<1	Sodium hydroxide (0.025 %, pH = 10)	<1
Diethyl glycol monomethyl ether	2.4	Water	<1
Hydraulic Oil	<1	Xylene	<1
Skydrol 5	<1	Strong Acid (HCl Conc)	8.2

ENGINEERING RESIN

Rigid 4000

Rigid 4000 Resin for Stiff, Strong, Engineering-Grade Prototypes

Glass-filled Rigid 4000 Resin prints with a smooth, polished finish and is ideal for stiff and strong parts that can withstand minimal deflection. Consider Rigid 4000 Resin for general load-bearing applications.

Mounts and brackets

Jigs and fixtures

Thin-walled parts

Simulates stiffness of PEEK



FLRGWH01

formlabs 

Prepared 10 . 20 . 2020
Rev 02 10 . 20 . 2020

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

RIGID 4000 MATERIAL PROPERTIES DATA

	METRIC ¹		IMPERIAL ¹		METHOD
	Green ²	UV ³	Green ²	UV ³	Testing Standard
Mechanical Properties					
Ultimate Tensile Strength	33 MPa	69 MPa	4786 psi	10007 psi	ASTM D 638-14
Tensile Modulus	2.1 GPa	4.1 GPa	305 ksi	595 ksi	ASTM D 638-14
Elongation at Break	23%	5.3%	23%	5.3%	ASTM D 638-14
Flexural Strength	43 MPa	105 MPa	6236 psi	15229 psi	ASTM D 790-15
Flexural Modulus	1.4 GPa	3.4 GPa	203 ksi	493 ksi	ASTM D 790-15
Notched IZOD	16 J/m	23 J/m	0.3 ft-lbf/in	0.43 ft-lbf/in	ASTM D256-10
Thermal Properties					
Heat Deflection Temp. @ 1.8 MPa	41 °C	60 °C	105 °F	140 °F	ASTM D 648-16
Heat Deflection Temp. @ 0.45 MPa	48 °C	77 °C	118 °F	170 °F	ASTM D 648-16
Thermal Expansion (0-150°C)	64 µm/m/°C	63 µm/m/°C	36 µin/in/°F	35 µin/in/°F	ASTM E 831-13

¹ Material properties can vary with part geometry, print orientation, print settings, and temperature.

² Data was obtained from green parts, printed using Form 3, 100 µm, Rigid 4000 (formerly Rigid v1) settings, without additional treatments.

³ Data was obtained from parts printed using Form 3, 100 µm, Rigid 4000 (formerly Rigid v1) settings and post-cured with a Form Cure for 15 minutes at 80 °C

Solvent Compatibility

Percent weight gain over 24 hours for a printed and post-cured 1 x 1 x 1 cm cube immersed in respective solvent:

Solvent	24 hr weight gain, %	Solvent	24 hr weight gain, %
Acetic Acid 5%	0.8	Hydrogen peroxide (3%)	0.87
Acetone	3.3	Isooctane (aka gasoline)	<0.1
Isopropyl Alcohol	0.38	Mineral oil (light)	0.22
Bleach ~5% NaOCl	0.69	Mineral oil (Heavy)	0.15
Butyl Acetate	<0.1	Salt Water (3.5% NaCl)	0.71
Diesel Fuel	<0.1	Sodium Hydroxide solution (0.025% PH 10)	0.68
Diethyl glycol Monomethyl Ether	1.4	Water	0.70
Hydraulic Oil	0.17	Xylene	<0.1
Skydrol 5	1.1	Strong Acid (HCl conc)	5.3

ENGINEERING RESIN

Rigid 10K

Rigid 10K Resin for Rigid, Strong, Industrial-Grade Prototypes



This highly glass-filled resin is the stiffest material in our engineering portfolio. Choose Rigid 10K Resin for precise industrial parts that need to withstand significant load without bending. Rigid 10K Resin exhibits a smooth matte finish and is highly resistant to heat and chemicals.

Short-run injection mold masters and inserts

Heat resistant and fluid exposed components, jigs, and fixtures

Aerodynamic test models

Simulates stiffness of glass and fiber-filled thermoplastics

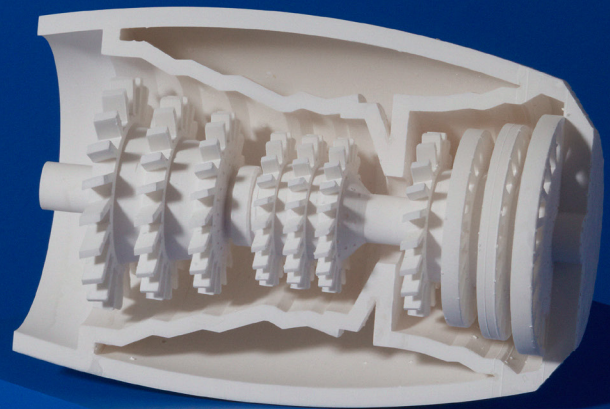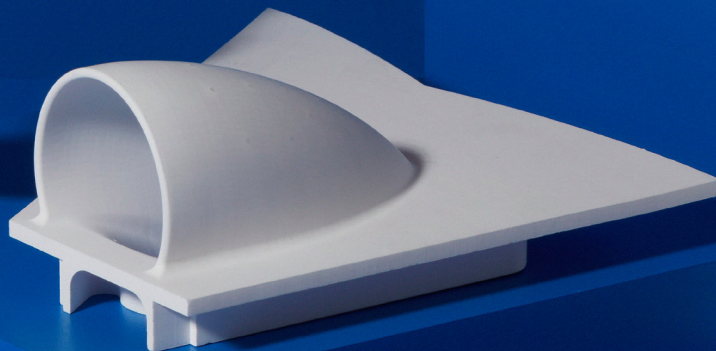

FLRG1001

formlabs 

Prepared 06 . 09 . 2020
Rev 01 06 . 09 . 2020

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

RIGID 10K MATERIAL PROPERTIES DATA

	METRIC			IMPERIAL			METHOD
	Green	UV ¹	UV+Thermal ²	Green	UV ¹	UV+Thermal ²	
Mechanical Properties							Testing Standard
Ultimate Tensile Strength	55 MPa	65 MPa	53 MPa	7980 psi	9460 psi	7710 psi	ASTM D 638-14
Tensile Modulus	7.5 GPa	10 GPa	10 GPa	1090 ksi	1480 ksi	1460 ksi	ASTM D 638-14
Elongation at Break	2%	1%	1%	2%	1%	1%	ASTM D 638-14
Flexural Strength	84 MPa	126 MPa	103 MPa	12200 psi	18200 psi	15000 psi	ASTM D 790-15
Flexural Modulus	6 GPa	9 GPa	10 GPa	905 ksi	1360 ksi	1500 ksi	ASTM D 790-15
Notched IZOD	16 J/m	16 J/m	18 J/m	0.3 ft-lbf/in	0.3 ft-lbf/in	0.3 ft-lbf/in	ASTM D256-10
Unnotched IZOD	41 J/m	41 J/m	41 J/m	0.8 ft-lbf/in	0.9 ft-lbf/in	0.7 ft-lbf/in	ASTM D4812-11
Thermal Properties							
HDT @ 0.45 MPa	65 °C	163 °C	218 °C	149 °F	325 °F	424 °F	ASTM D 648-16
HDT @ 1.8 MPa	56 °C	82 °C	110 °C	133 °F	180 °F	230 °F	ASTM D 648-16
CTE, 0-150 °C	48 µm/m/°C	47 µm/m/°C	46 µm/m/°C	27 µin/in/°F	26 µin/in/°F	26 µin/in/°F	ASTM E 831-13

All testing specimens were printed using Form 3

¹ Data was obtained from parts printed using Form 3, 100 µm and post-cured with a Form Cure for 60 minutes at 70°C

² Data was obtained from parts printed using Form 3, 100 µm and post-cured with a Form Cure for 60 minutes at 60°C and an additional thermal cure at 125°C for 90 minutes

Solvent Compatibility

Percent weight gain over 24 hours for a printed and post-cured 1 x 1 x 1 cm cube immersed in respective solvent:

Solvent	24 hr weight gain, %	Solvent	24 hr weight gain, %
Acetic Acid 5%	<0.1	Isooctane (aka gasoline)	0
Acetone	<0.1	Mineral oil (light)	0.2
Isopropyl Alcohol	<0.1	Mineral oil (Heavy)	<0.1
Bleach ~5% NaOCl	0.1	Salt Water (3.5% NaCl)	0.1
Butyl Acetate	0.1	Sodium Hydroxide solution (0.025% PH 10)	0.1
Diesel Fuel	0.1	Water	<0.1
Diethyl glycol Monomethyl Ether	0.4	Xylene	<0.1
Hydraulic Oil	0.2	Strong Acid (HCl conc)	0.2
Skydrol 5	0.6	Tripropylene glycol monomethyl ether	0.4
Hydrogen peroxide (3%)	<0.1		

ENGINEERING RESIN

Tough 2000

Tough 2000 Resin for Rugged Prototyping

Tough 2000 Resin is the strongest and stiffest material in our functional family of Tough and Durable Resins. Choose Tough 2000 Resin for prototyping strong and sturdy parts that should not bend easily.

Strong and stiff prototypes

Sturdy jigs and fixtures

ABS-like strength and stiffness



V1 FLTO2001

formlabs 

Prepared 03 . 02 . 2020
Rev 01 03 . 02 . 2020

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

Tough 2000 Resin Material Properties Data

	METRIC ¹		IMPERIAL ¹		METHOD
	Green ²	Post-Cured ³	Green ²	Post-Cured ³	
Mechanical Properties					
Ultimate Tensile Strength	29 MPa	46 MPa	4206 psi	6671 psi	ASTM D 638-14
Tensile Modulus	1.2 GPa	2.2 GPa	174 ksi	329 ksi	ASTM D 638-14
Elongation at Break	74 %	48 %	74 %	48 %	ASTM D 638-14
Flexural Properties					
Flexural Strength	17 MPa	65 MPa	2465 psi	9427 psi	ASTM D 790-15
Flexural Modulus	0.45 GPa	1.9 GPa	65 ksi	275 ksi	ASTM D 790-15
Impact Properties					
Notched IZOD	79 J/m	40 J/m	1.5 ft-lbf/in	0.75 ft-lbf/in	ASTM D256-10
Unnotched IZOD	208 J/m	715 J/m	3.9 ft-lbf/in	13 ft-lbf/in	ASTM D4812-11
Thermal Properties					
Heat Deflection Temp. @ 1.8 MPa	42 °C	53 °C	108 °F	127 °F	ASTM D 648-16
Heat Deflection Temp. @ 0.45 MPa	48 °C	63 °C	118 °F	145 °F	ASTM D 648-16
Coefficient of Thermal Expansion	107 µm/m/°C	91 µm/m/°C	59 µin/in/°F	50 µin/in/°F	ASTM E 831-13

¹Material properties can vary with part geometry, print orientation, print settings, and temperature.

²Data was obtained from green parts, printed using Form 2, 100 µm, Tough 2000 settings, washed and air dried without post cure.

³Data was obtained from parts printed using Form 2, 100 µm, Tough 2000 settings, and post-cured with a Form Cure for 120 minutes at 80 °C.

Solvent Compatibility

Percent weight gain over 24 hours for a printed and post-cured 1 x 1 x 1 cm cube immersed in respective solvent:

Solvent	24 Hour Weight Gain (%)	Solvent	24 Hour Weight Gain (%)
Acetic Acid, 5 %	0.71	Hydrogen Peroxide (3 %)	0.63
Acetone	18.82	Isooctane	0.03
Isopropyl Alcohol	3.7	Mineral Oil, light	0.13
Bleach, ~5 % NaOCl	0.56	Mineral Oil, heavy	0.17
Butyl Acetate	6.19	Salt Water (3.5 % NaCl)	0.56
Diesel	0.06	Sodium hydroxide (0.025 %, pH = 10)	0.61
Diethyl glycol monomethyl ether	5.32	Water	0.61
Hydraulic Oil	0.08	Xylene	4.1
Skydrol 5	0.87	Strong Acid (HCl Conc)	3.01

ENGINEERING RESIN

Tough 1500

Tough 1500 Resin for Resilient Prototyping

Tough 1500 Resin is the most resilient material in our functional family of Tough and Durable Resins. It produces stiff and pliable parts that bend and spring back quickly under cyclic loading.

Springy prototypes and assemblies

Snap fit and press fit connectors

Polypropylene-like strength and stiffness



V1 **FLTO1501**

formlabs 

Prepared 01 . 27 . 2020
Rev 01 01 . 27 . 2020

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

Tough 1500 Resin Material Properties Data

	METRIC ¹		IMPERIAL ¹		METHOD
	Green ²	Post-Cured ³	Green ²	Post-Cured ³	
Mechanical Properties					
Ultimate Tensile Strength	26 MPa	33 MPa	3771 psi	4786 psi	ASTM D 638-14
Tensile Modulus	0.94 GPa	1.5 GPa	136 ksi	218 ksi	ASTM D 638-14
Elongation at Break	69 %	51 %	69 %	51 %	ASTM D 638-14
Flexural Properties					
Flexural Strength	15 MPa	39 MPa	2175 psi	5656 psi	ASTM D 790-15
Flexural Modulus	0.44 GPa	1.4 GPa	58 ksi	203 ksi	ASTM D 790-15
Impact Properties					
Notched IZOD	72 J/m	67 J/m	1.3 ft-lbf/in	1.2 ft-lbf/in	ASTM D256-10
Unnotched IZOD	902 J/m	1387 J/m	17 ft-lbf/in	26 ft-lbf/in	ASTM D4812-11
Thermal Properties					
Heat Deflection Temp. @ 1.8 MPa	34 °C	45 °C	93 °F	113 °F	ASTM D 648-16
Heat Deflection Temp. @ 0.45 MPa	42 °C	52 °C	108 °F	126 °F	ASTM D 648-16
Thermal Expansion	114 µm/m/°C	97 µm/m/°C	63 µin/in/°F	54 µin/in/°F	ASTM E 831-13

¹Material properties can vary with part geometry, print orientation, print settings, and temperature.

²Data was obtained from green parts, printed using Form 2, 100 µm without additional treatments.

³Data was obtained from parts printed using Form 2, 100 µm and post-cured with a Form Cure for 60 minutes at 70 C.

Solvent Compatibility

Percent weight gain over 24 hours for a printed and post-cured 1 x 1 x 1 cm cube immersed in respective solvent:

Solvent	24 Hour Weight Gain (%)	Solvent	24 Hour Weight Gain (%)
Acetic Acid, 5 %	0.75	Hydrogen Peroxide (3 %)	0.71
Acetone	19.07	Isooctane	0.02
Isopropyl Alcohol	3.15	Mineral Oil, light	0.05
Bleach, ~5 % NaOCl	0.62	Mineral Oil, heavy	0.09
Butyl Acetate	5.05	Salt Water (3.5 % NaCl)	0.66
Diesel	0.11	Sodium hydroxide (0.025 %, pH = 10)	0.7
Diethyl glycol monomethyl ether	5.25	Water	0.69
Hydraulic Oil	0.17	Xylene	3.22
Skydrol 5	0.46	Strong Acid (HCl Conc)	4.39

Durable

Durable Resin for Pliable Prototyping

Durable Resin is the most pliable, impact resistant, and lubricious material in our functional family of Tough and Durable Resins. Choose Durable Resin for squeezable parts and low-friction assemblies.

Squeezable prototypes

Low friction and non-degrading surfaces

Impact resistant jigs

Polyethylene-like strength and stiffness



V2 **FLDUCL02**

formlabs 

Prepared 01 . 26 . 2018
Rev 02 03 . 16 . 2020

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

Durable Material Properties Data

	METRIC ¹		IMPERIAL ¹		METHOD
	Green ²	Post-Cured ³	Green ²	Post-Cured ³	
Tensile Properties					
Ultimate Tensile Strength	13 MPa	28 MPa	1900 psi	3980 psi	ASTM D 638-14
Tensile Modulus	0.24 GPa	1.0 GPa	34 ksi	149 ksi	ASTM D 638-14
Elongation at Break	75 %	55 %	75 %	55 %	ASTM D 638-14
Flexural Properties					
Flexural Stress at 5% Strain	1.0 MPa	24 MPa	149 psi	3420 psi	ASTM D 790-17, Procedure A
Flexural Modulus	0.04 GPa	0.66 GPa	5.58 ksi	94.1 ksi	ASTM D 790-17, Procedure A
Impact Properties					
Notched IZOD	127 J/m	114 J/m	2.37 ft-lbf/in	2.13 ft-lbf/in	ASTM D 256-10 (2018), Test Method A
Unnotched IZOD	972 J/m	710 J/m	18.2 ft-lbf/in	13.3 ft-lbf/in	ASTM D4812-11
Temperature Properties					
Heat Deflection Temp. @ 0.45 MPa	< 30 °C	41 °C	< 86 °F	105 °F	ASTM D 648-18, Method B
Thermal Expansion	124 µm/m/°C	106 µm/m/°C	69.1 µin/in/°F	59 µin/in/°F	ASTM E831-14

¹Material properties can vary with part geometry, print orientation, print settings, and temperature.

²Data was obtained from green parts, printed using Form 2, 100 µm without additional treatments.

³Data was obtained from parts printed using Form 2, 100 µm and post-cured with a Formcure for 120 minutes at 60°C.

Solvent Compatibility

Percent weight gain over 24 hours for a printed and post-cured 1 x 1 x 1 cm cube immersed in respective solvent:

Mechanical Properties	24 Hour Weight Gain (%)	Mechanical Properties	24 Hour Weight Gain (%)
Acetic Acid, 5 %	1.3	Hydrogen Peroxide (3 %)	1
Acetone	sample cracked	Isooctane	< 1
Isopropyl Alcohol	5.1	Mineral Oil, light	< 1
Bleach, ~5 % NaOCl	< 1	Mineral Oil, heavy	< 1
Butyl Acetate	7.9	Salt Water (3.5 % NaCl)	< 1
Diesel	< 1	Sodium hydroxide (0.025 %, pH = 10)	< 1
Diethyl glycol monomethyl ether	7.8	Water	< 1
Hydraulic Oil	< 1	Xylene	6.5
Skydrol 5	1.3	Strong Acid (HCl Conc)	distorted

ENGINEERING RESIN

Flexible 80A

Flexible 80A Resin for Hard Flexible Prototypes

Flexible 80A Resin is the most stiff soft-touch material in our library of Flexible and Elastic Resins, with an 80A Shore durometer to simulate the flexibility of rubber or TPU.

Balancing softness with strength, Flexible 80A Resin can withstand bending, flexing, and compression, even through repeated cycles. This material is well-suited for cushioning, damping, and shock absorption.

Handles, grips, overmolds

Cartilage and ligament anatomy

Seals, gaskets, masks



FLFL8001

* May not be available in all regions

formlabs 

Prepared 05 . 29 . 2020
Rev 01 05 . 29 . 2020

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

Flexible 80A Resin Material Properties Data

	METRIC ¹		IMPERIAL ¹		METHOD
	Green	Post-Cured ²	Green	Post-Cured ²	
Mechanical Properties					
Ultimate Tensile Strength ³	3.7 MPa	8.9 MPa	539 psi	1290 psi	ASTM D 412-06 (A)
Stress at 50% Elongation	1.5 MPa	3.1 MPa	218 psi	433 psi	ASTM D 412-06 (A)
Stress at 100% Elongation	3.5 MPa	6.3 MPa	510 psi	909 psi	ASTM D 412-06 (A)
Elongation at Break	100%	120%	100%	120%	ASTM D 412-06 (A)
Shore Hardness	70A	80 A	70A	80 A	ASTM 2240
Compression Set (23 °C for 22 hours)	Not Tested	3%	Not Tested	3%	ASTM D 624-00
Compression Set (70 °C for 22 hours)	Not Tested	5%	Not Tested	5%	ASTM D 395-03 (B)
Tear Strength ⁴	11 kN/m	24 kN/m	61 lbf/in	137 lbf/in	ASTM D 395-03 (B)
Ross Flex Fatigue at 23 °C	Not Tested	>200,000 cycles	Not Tested	>200,000 cycles	ASTM D1052, (notched), 60° bending, 100 cycles/minute
Ross Flex Fatigue at -10 °C	Not Tested	>50,000 cycles	Not Tested	>50,000 cycles	ASTM D1052, (notched), 60° bending, 100 cycles/minute
Bayshore Resilience	Not Tested	28%	Not Tested	28%	ASTM D2632
Thermal Properties					
Glass transition temperature (Tg)	Not Tested	27 °C	Not Tested	27 °C	DMA

¹Material properties can vary with part geometry, print orientation, print settings and temperature.

²Data was obtained from parts printed using Form 3, 100 µm, Flexible 80A settings, washed in Form Wash for 10 minutes and postcured with Form Cure at 60 °C for 10 minutes.

³Tensile testing was performed after 3+ hours at 23 °C, using a Die C specimen cut from sheets.

⁴Tear testing was performed after 3+ hours at 23 °C, using a Die C tear specimen directly printed.

Solvent Compatibility

Percent weight gain over 24 hours for a printed and post-cured 1 x 1 x 1 cm cube immersed in respective solvent:

Solvent	24 Hour Weight Gain (%)	Solvent	24 Hour Weight Gain (%)
Acetic Acid, 5 %	0.9	Hydrogen Peroxide (3 %)	0.7
Acetone	37.4	Isooctane (aka gasoline)	1.6
Isopropyl Alcohol	11.7	Mineral Oil, light	0.1
Bleach, ~5 % NaOCl	0.6	Mineral Oil, heavy	<0.1
Butyl Acetate	51.4	Salt Water (3.5 % NaCl)	0.5
Diesel	2.3	Sodium hydroxide (0.025 %, pH = 10)	0.6
Diethyl glycol monomethyl ether	19.3	Water	0.7
Hydraulic Oil	1.0	Xylene	64.1
Skydrol 5	10.7	Strong Acid (HCl Conc)	28.6
Tripropylene Glycol Methyl Ether	13.6		

High Temp

High Temp for Heat Resistance

High Temp Resin offers a heat deflection temperature (HDT) of 238 °C @ 0.45 MPa, the highest among Formlabs resins. Use it to print detailed, precise prototypes with high temperature resistance.

Hot air, gas, and fluid flow

Molds and inserts

Heat resistant mounts, housings, and fixtures



V2 **FLFLGR02**

formlabs 

Prepared 04 . 19 . 2016
Rev 01 04 . 18 . 2017

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

Material Properties Data Metric

	METRIC ¹			IMPERIAL ¹			METHOD
	Green ²	Post-Cured ²	Post-Cured + additional thermal cure ⁴	Green ²	Post-Cured ³	Post-Cured + additional thermal cure ⁴	
Tensile Properties							
Ultimate Tensile Strength	20.9 MPa	58.3 MPa	48.7 MPa	3031 psi	8456 psi	7063 psi	ASTM D 638-14
Elongation at Break	14 %	3.3 %	2.3 %	14 %	3.3 %	2.3 %	ASTM D 638-14
Tensile Modulus	0.75 GPa	2.8 GPa	2.8 GPa	109 ksi	399 ksi	406 ksi	ASTM D 638-14
Flexural Properties							
Flexural Strength at Break	24.1 MPa	94.5 MPa	2.8 MPa	3495 psi	13706 psi	14097 ksi	ASTM D 790-15
Flexural Modulus	0.7 GPa	2.6 GPa	2.8 GPa	100 ksi	400 ksi	406 ksi	ASTM D 790-15
Impact Properties							
Notched IZOD	32.8 J/m	18.2 J/m	16.9 J/m	0.61 ft-lbf/in	0.34 ft-lbf/in	0.32 ft-lbf/in	ASTM D256-10
Temperature Properties							
Coefficient of Thermal Expansion (0-150 °C)	118.1 μm/m/°C	79.6 μm/m/°C	74.5 μm/m/°C	41.4 μin/in/°F	44.2 μin/in/°F	41.4 μin/in/°F	ASTM E 831-13
Heat Deflection Temp. @ 0.45 MPa	49 °C	120 °C	238 °C	120 °F	248 °F	460 °F	ASTM D 648-16
Heat Deflection Temp. @ 1.8 MPa	44 °C	78 °C	101 °C	111 °F	172 °F	214 °F	ASTM D 648-16

¹Material properties can vary with part geometry, print orientation, print settings, and temperature.

²Data was obtained from green parts, printed using Form 2, 100 μm, High Temp settings, washed and air dried without post cure.

³Data was obtained from parts printed using a Form 2, 100 μm, High Temp settings, and post-cured with Form Cure at 60 °C for 60 minutes.

⁴Data was obtained from parts printed using a Form 2, 100 micron, High Temp settings, and post-cured with Form Cure at 80 °C for 120 minutes plus an additional thermal cure in a lab oven at 160°C for 180 minutes

Solvent Compatibility

Percent weight gain over 24 hours for a printed and post-cured 1 x 1 x 1 cm cube immersed in respective solvent:

Solvent	24 hr weight gain (%)	24 hr size gain (%)	Solvent	24 hr weight gain (%)	24 hr size gain (%)
Acetic Acid, 5 %	< 1	< 1	Hydrogen peroxide (3%)	< 1	< 1
Acetone	< 1	< 1	Isooctane (aka gasoline)	< 1	< 1
Isopropyl Alcohol	< 1	< 1	Mineral oil (light)	< 1	< 1
Bleach ~5% NaOCl	< 1	< 1	Mineral oil (Heavy)	< 1	< 1
Butyl Acetate	< 1	< 1	Salt Water (3.5% NaCl)	< 1	< 1
Diesel Fuel	< 1	< 1	Sodium Hydroxide solution (0.025% PH 10)	< 1	< 1
Diethyl glycol Monomethyl Ether	< 1	< 1	Water	< 1	< 1
Hydraulic Oil	< 1	< 1	Xylene	< 1	< 1
Skydrol 5	< 1	< 1	Strong Acid (HCl conc)	1.2	< 1

Elastic 50A

Elastic Resin for Soft Flexible Parts

Our softest Engineering Resin, this 50A Shore durometer material is suitable for prototyping parts normally produced with silicone. Choose Elastic Resin for parts that will bend, stretch, compress, and hold up to repeated cycles without tearing.

Wearables and consumer goods prototyping

Medical models and devices

Compliant features for robotics

Special effects props and models



V1 FLELCL01

formlabs 

Prepared 01 . 07 . 2019
Rev 01 01 . 07 . 2019

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

Material Properties Data

	METRIC ¹		IMPERIAL ¹		METHOD
	Green	Post-Cured ²	Green	Post-Cured ²	
Ultimate tensile strength ³	1.61 MPa	3.23 MPa	234 psi	468 psi	ASTM D 412-06 (A)
Stress at 50% elongation	.92 MPa	.94 MPa	133 psi	136 psi	ASTM D 412-06 (A)
Stress at 100% elongation	1.54 MPa	1.59 MPa	223 psi	231 psi	ASTM D 412-06 (A)
Elongation at Failure ³	100%	160%	100%	160%	ASTM D 412-06 (A)
Compression set at 23C for 22 hrs	2%	2%	2%	2%	ASTM D 395-03 (B)
Compression set at 70C for 22 hrs	3%	9%	3%	9%	ASTM D 395-03 (B)
Tear strength ⁴	8.9 kN/m	19.1 kN/m	51 lbf/in	109 lbf/in	ASTM D 624-00
Shore hardness	40A	50A	40A	50A	ASTM 2240

¹ Material properties can vary with part geometry, print orientation, print settings and temperature.

² Data was obtained from parts printed using Form 2, 100 µm, Elastic settings, washed in Form Wash for 20 minutes and postcured with Form Cure at 60C for 20 minutes.

³ Tensile testing was performed after 3+ hours at 23 °C, using a Die C dumbbell and 20 in/min cross head speed.

⁴ Tear testing was performed after 3+ hours at 23 °C, using a Die C tear specimen and a 20 in/min cross head speed

Solvent Compatibility

Percent weight gain over 24 hours for a printed and post-cured 1 x 1 x 1 cm cube immersed in respective solvent:

Mechanical Properties	24 hr size gain (%)	24 hr weight gain (%)	Mechanical Properties	24 hr size gain (%)	24 hr weight gain (%)
Acetic Acid, 5 %	<1	2.8	Hydrogen Peroxide (3 %)	<1	2.2
Acetone	19.3	37.3	Isooctane	<1	3.5
Isopropyl Alcohol	13.3	25.6	Mineral Oil, light	<1	<1
Bleach, ~5 % NaOCl	<1	2	Mineral Oil, heavy	<1	<1
Butyl Acetate	18.2	39.6	Salt Water (3.5 % NaCl)	<1	1.7
Diesel	1.2	4.2	Sodium hydroxide (0.025 %, pH = 10)	<1	2
Diethyl glycol monomethyl ether	12	28.6	Water	<1	2.3
Hydraulic Oil	<1	2.1	Xylene	20.4	46.6
Skydrol 5	9.9	21.7	Strong Acid (HCl Conc)	14.2	39.4

MATERIALS LIBRARY

Medical

High-Performance Materials for Biocompatible Applications

Our new library of biocompatible, sterilizable, BioMed Resins are manufactured in an ISO 13485 certified facility to help medical device and point-of-care manufacturers reduce costs, iterate quickly, and print a wide range of end-use tools, instruments, and devices that support the practice of medicine.



MEDICAL RESIN

BioMed Clear

Biocompatible Photopolymer Resin for Formlabs SLA Printers

BioMed Clear Resin is a rigid material for biocompatible applications requiring long-term skin or mucosal membrane contact. This USP Class VI certified material is suitable for applications that require wear resistance and low water absorption over time. Parts printed with BioMed Clear Resin are compatible with common sterilization methods. BioMed Clear Resin is manufactured in our ISO 13485 facility and is supported with an FDA Device Master File.

Consider BioMed Clear Resin for:

Medical devices and device components

Parts containing breathing gas pathways

Respirator and ventilator components

Drug delivery devices



Surgical planning and implant sizing tools

Bioprocessing equipment

Research and development

Jigs and fixtures

Masks

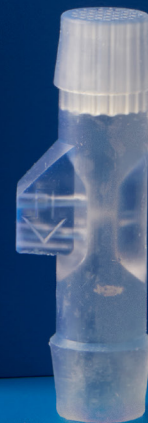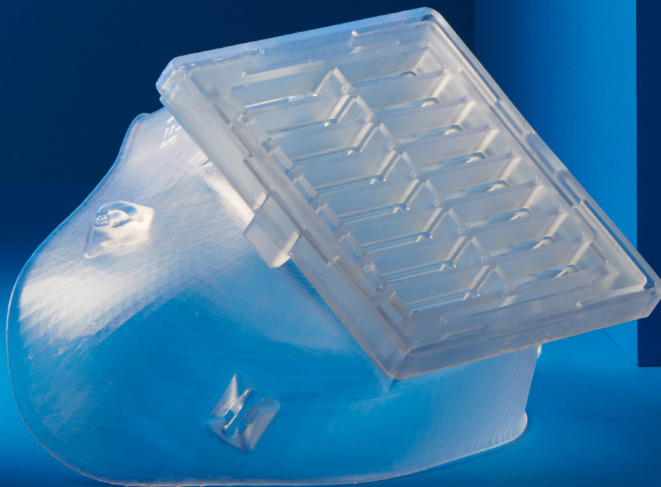

FLBMCL01

formlabs  | medical

Prepared 06 . 12 . 2020
Rev 02 09 . 16 . 2020

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

BIOMED CLEAR MATERIAL PROPERTIES DATA

	METRIC	IMPERIAL	METHOD
	Post-Cured ^{1,2}	Post-Cured ^{1,2}	
Tensile Properties			
Ultimate Tensile Strength	52 MPa	7.5 ksi	ASTM D638-10 (Type IV)
Young's Modulus	2080 MPa	302 ksi	ASTM D638-10 (Type IV)
Elongation	12%	12%	ASTM D638-10 (Type IV)
Flexural Properties			
Flexural Strength	84 MPa	12.2 ksi	ASTM D790-15 (Method B)
Flexural Modulus	2300 MPa	332 ksi	ASTM D790-15 (Method B)
Hardness Properties			
Hardness Shore D	78 D	78 D	ASTM D2240-15 (Type D)
Impact Properties			
Notched IZOD	35 J/m	0.658 ft-lbf/in	ASTM D256-10 (Method A)
Unnotched IZOD	449 J/m	8.41 ft-lbf/in	ASTM D4812-11
Thermal Properties			
Heat Deflection Temp. @ 1.8 MPa	54 °C	129 °F	ASTM D648-18 (Method B)
Heat Deflection Temp. @ 0.45 MPa	67 °C	152 °F	ASTM D648-18 (Method B)
Coefficient of Thermal Expansion	82 µm/m/°C	45 µin/in/°F	ASTM E831-14
Other Properties			
Water Absorption	0.54%	0.54%	ASTM D570-98 (2018)

Sterilization Compatibility

E-beam	35 kGy E-beam radiation
Ethylene Oxide	100% Ethylene oxide at 55°C for 180 minutes
Gamma	29.4 - 31.2 kGy gamma radiation
Steam Sterilization	Autoclave at 134°C for 20 minutes Autoclave at 121°C for 30 minutes

Disinfection Compatibility

Chemical Disinfection	70% Isopropyl Alcohol for 5 minutes
-----------------------	-------------------------------------

For more details on sterilization compatibilities, visit formlabs.com.

Samples printed with BioMed Clear Resin has been evaluated in accordance with ISO 10993-1:2018, ISO 7405:2018, ISO 18562-1:2017 and has passed the requirements associated with the following biocompatibility endpoints:

ISO Standard	Test Description ³
EN ISO 10993-5:2009	Not cytotoxic
ISO 10993-10:2010/(R)2014	Not an irritant
ISO 10993-10:2010/(R)2014	Not a sensitizer
ISO 10993-3:2014	Not genotoxic

ISO Standard	Test Description ³
ISO 10993-11:2017	Not mutagenic
ISO 18562-2:2017	Does not emit particulates
ISO 18562-3:2017	Does not emit VOCs
ISO 18562-4:2017	Does not emit hazardous water-soluble substances

The product was developed and is in compliance with the following ISO Standards:

ISO Standard	Description
EN ISO 13485:2016	Medical Devices – Quality Management Systems – Requirements for Regulatory Purposes
EN ISO 14971:2012	Medical Devices – Application of Risk Management to Medical Devices

¹ Material properties may vary based on part geometry, print orientation, print settings, temperature, and disinfection or sterilization methods used.

² Data were measured on post-cured samples printed on a Form 3B printer with 100 µm BioMed Clear Resin settings, washed in a Form Wash for 20 minutes in 99% Isopropyl Alcohol, and post-cured at 60°C for 60 minutes in a Form Cure.

³ BioMed Clear Resin was tested at NAMSA World Headquarters, OH, USA.

MATERIAL DATA SHEET

BioMed Amber

BioMed Amber Resin for Short-Term Bodily Contact

BioMed Amber Resin is designed for the manufacture of biocompatible 3D printed parts with high dimensional accuracy, stiffness, and strength. This material is developed specifically for Formlabs printers, rigorously tested, and manufactured in a clean room at our own ISO 13485 certified facility for consistent cross-batch quality. The parts printed with BioMed Amber Resin are compatible with common solvent disinfection and sterilization methods.

Drilling templates


Fixation trays

Implant guides

Implant sizing templates

Medical device components

Surgery planning tools

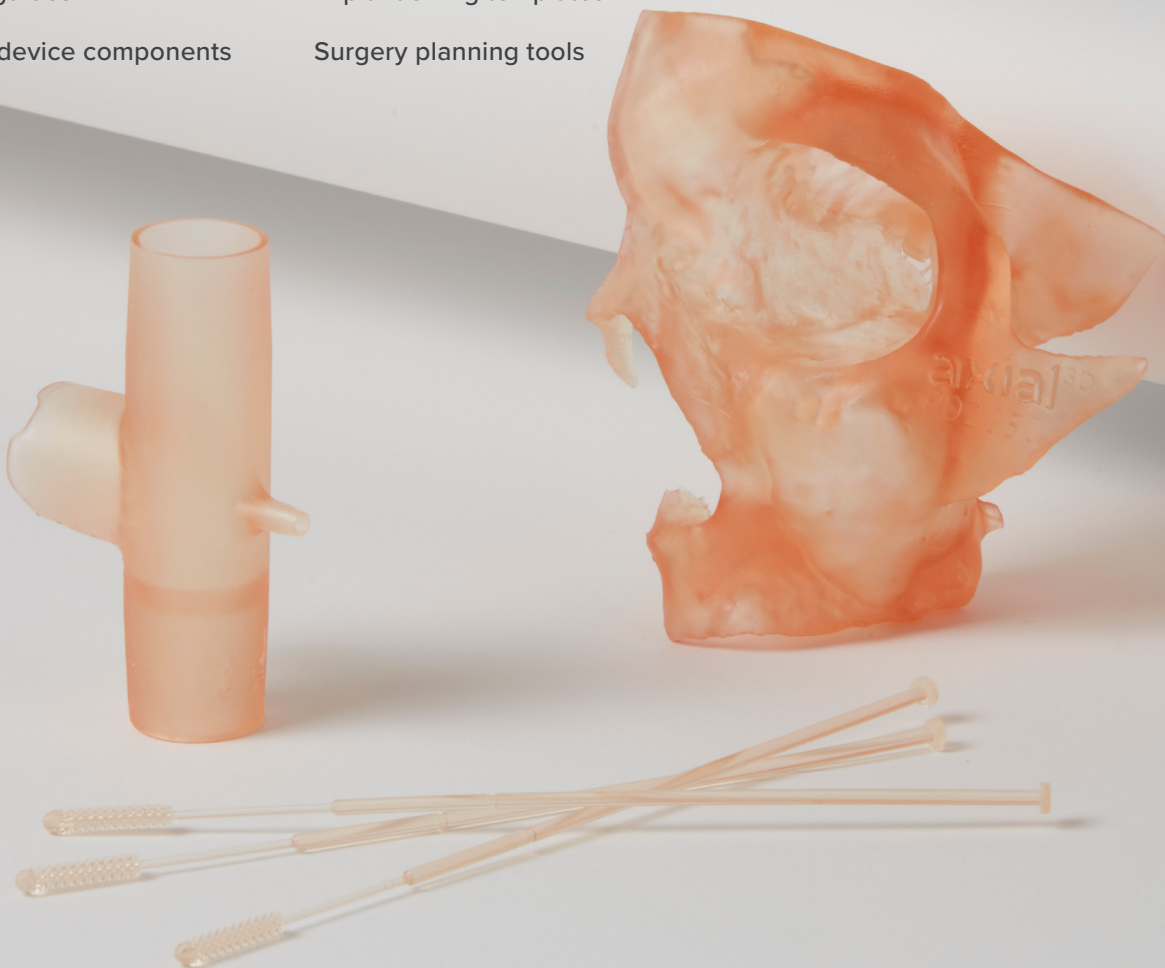

FLBMAM01

formlabs  | **medical**

Prepared 11 . 04 . 2019
Rev 01 11 . 04 . 2019

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

Material Properties Data

	METRIC	IMPERIAL	METHOD
	Post-Cured ^{1,2}	Post-Cured ^{1,2}	
Tensile Properties			
Ultimate Tensile Strength	73 MPa	11 ksi	ASTM D638-10 (Type IV)
Young's Modulus	2.9 GPa	420 ksi	ASTM D638-10 (Type IV)
Elongation	12.3%	12.3%	ASTM D638-10 (Type IV)
Flexural Properties			
Flexural Strength	103 MPa	15 ksi	ASTM D790-15 (Method B)
Flexural Modulus	2.5 GPa	363 ksi	ASTM D790-15 (Method B)
Hardness Properties			
Hardness Shore D	67 D	67 D	ASTM D2240-15 (Type D)

Disinfection Compatibility

Chemical Disinfection	70% Isopropyl Alcohol for 5 minutes
-----------------------	-------------------------------------

Sterilization Compatibility

Steam Sterilization	Autoclave at 134 °C for 20 minutes Autoclave at 121 °C for 30 minutes
---------------------	--

BioMed Amber Resin has been evaluated in accordance with ISO 10993-1:2018, Biological evaluation of medical devices - Part 1: Evaluation and testing within a risk management process, and ISO 7405:2009/(R)2015, Dentistry - Evaluation of biocompatibility of medical devices used in dentistry, and passed the requirements for the following biocompatibility risks:

ISO Standard	Description ³
EN ISO 10993-5:2009	Not Cytotoxic
ISO 10993-10:2010/(R)2014	Non Irritation
ISO 10993-10:2010/(R)2014	Not a sensitizer

The product was developed and is in compliance with the following ISO Standards:

ISO Standard	Description
EN ISO 13485:2016	Medical Devices – Quality Management Systems – Requirements for Regulatory Purposes
EN ISO 14971:2012	Medical Devices – Application of Risk Management to Medical Devices

NOTES:

¹ Material properties may vary based on part geometry, print orientation, print settings, temperature, and disinfection or sterilization methods used.

² Data for post-cured samples were measured on Type IV tensile bars printed on a Form 2 printer with 100 µm BioMed Amber Resin settings, washed in a Form Wash for 20 minutes in 99% Isopropyl Alcohol, and post-cured at 60°C for 30 minutes in a Form Cure.

³ BioMed Amber Resin was tested at NAMSA World Headquarters, OH, USA.

MATERIALS LIBRARY

Dental

High-Accuracy Materials for Dental Labs and Practices

Formlabs Dental Resins empower dental labs and practices to rapidly manufacture biocompatible surgical guides, splints, fixed patterns and models, clear aligner models, and full dentures.

* May not be available in all regions



MEDICAL RESIN

Custom Tray

Biocompatible Photopolymer Resin for Form 2 and Form 3B

Use Custom Tray Resin to directly print impression trays for implants, dentures, crowns and bridges, and other comprehensive cases. Digitally manufactured impression trays provide consistent, accurate impressions for high-quality dentistry. Custom Tray Resin prints full impression trays quickly using 200 micron layer heights, reducing labor time and enabling higher throughput.

Impression Trays



V1

FLCTBL01

* May not be available in all regions

formlabs  | dental

Prepared 06 . 09 . 2020
Rev 01 06 . 09 . 2020

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

CUSTOM TRAY MATERIAL PROPERTIES DATA

	METRIC	IMPERIAL	
Mechanical Properties	Post-Cured ^{1,2}	Post-Cured ^{1,2}	Method
Ultimate Tensile Strength	74 MPa	11.7 ksi	ASTM D638-10 (Type IV)
Young's Modulus	2900 MPa	435 ksi	ASTM D638-10 (Type IV)
Elongation	3.2%	3.2%	ASTM D638-10 (Type IV)
Flexural Strength	110 MPa	15.9 ksi	ASTM D790-15 (Method B)
Flexural Modulus	2700 MPa	392 ksi	ASTM D790-15 (Method B)
Hardness Shore D	82 D	82 D	ASTM D2240-15 (Type D)

Disinfection Compatibility

Chemical Disinfection	70% Isopropyl Alcohol for 5 minutes
-----------------------	-------------------------------------

Custom Tray Resin has been evaluated in accordance with ISO 10993-1:2018, *Biological evaluation of medical devices - Part 1: Evaluation and testing within a risk management process*, and ISO 7405:2009/(R)2015, *Dentistry - Evaluation of biocompatibility of medical devices used in dentistry*, and passed the requirements for the following biocompatibility risks:

ISO Standard	Description ³
EN ISO 10993-5:2009	Not cytotoxic
ISO 10993-10:2010/(R)2014	Not an irritant
ISO 10993-10:2010/(R)2014	Not a sensitizer

The product was developed and is in compliance with the following ISO Standards:

ISO Standard	Description
EN ISO 13485:2016	Medical Devices – Quality Management Systems – Requirements for Regulatory Purposes
EN ISO 14971:2012	Medical Devices – Application of Risk Management to Medical Devices

¹ Material properties may vary based on part geometry, print orientation, print settings, temperature, and disinfection or sterilization methods used.

² Data for post-cured samples were measured on Type IV tensile bars printed on a Form 2 printer with 200 µm Custom Tray Resin settings, washed in a Form Wash for 10 minutes in 99% Isopropyl Alcohol, and post-cured at 60°C for 30 minutes in a Form Cure.

³ Custom Tray Resin was tested at NAMS World Headquarters, OH, USA.

DENTAL RESIN

Temporary CB

Photopolymer Resin for Form 2 and Form 3B

Temporary CB Resin is a Class IIa material designed to 3D print biocompatible dental prosthetics with the Form 3B and Form 2 printers. This tooth-colored resin can print at 50 micron layer line resolutions to produce precisely fitting temporaries with a smooth surface finish, high resolution, and dimensional stability. Restorations made from Temporary CB Resin may remain in the mouth for up to 12 months.

Temporary CB Resin is only validated for use with the Stainless Steel Build Platform.

Temporary Restorations:

Crowns

Bridges (up to 7 units)

Inlays

Onlays

Veneers



FLTCA201
FLTCA301

FLTCB101
FLTCC201

* May not be available in all regions

formlabs  | dental

Prepared 06 . 09 . 2020
Rev 01 06 . 09 . 2020

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

TEMPORARY CB MATERIAL PROPERTIES DATA

VITA¹ Classical Shades: A2, A3, B1, C2

Mechanical Properties	Measured Value	Method
Density	1.4 - 1.5 g/cm ³	BEGO Standard
Viscosity	2500 - 6000 MPa*s	BEGO Standard
Flexural Strength (Post cured) ^{2,3,4}	≥ 100MPa	EN ISO 10477 Standard EN ISO 4049 Standard

Temporary CB Resin is a Medical Device as defined in the Medical Device Directive (93/42/EEC) in the EU and in Section 201(h) of the Federal Food Drug & Cosmetic (FD&C) Act.

Restorations printed with Temporary CB Resin have been evaluated in accordance with ISO 10993-1:2018, *Biological evaluation of medical devices - Part 1: Evaluation and testing within a risk management process*, and ISO 7405:2009/(R)2015, *Dentistry - Evaluation of biocompatibility of medical devices used in dentistry*, and passed the requirements for the following biocompatibility risks:

ISO Standard	Description ⁵
EN ISO 10993-5:2009	Not cytotoxic
ISO 10993-10:2010/(R)2014	Not an irritant
ISO 10993-10:2010/(R)2014	Not a sensitizer
ISO 10993-3:2014	Not genotoxic
ISO 10993-1:2009	Not toxic

The product was developed and is in compliance with the following ISO Standards:

ISO Standard	Description
EN ISO 13485:2016	Medical Devices – Quality Management Systems – Requirements for Regulatory Purposes
EN ISO 14971:2019	Medical Devices – Application of Risk Management to Medical Devices

¹ VITA is a registered trademark of a company which is not affiliated with Formlabs Inc.

² Material properties may vary based on part geometry, print orientation, print settings, and environmental conditions.

³ Test samples were printed with a Stainless Steel Build Platform on a Form 2 and Form 3B printer with 50 µm Temporary CB Resin settings. The printed samples were post-processed as recommended in the Instructions for Use.

⁴ Data for post-cured samples were measured on 3 point bending test specimens according to EN ISO 10477 and EN ISO 4049 standards.

⁵ Temporary CB Resin was tested at Eurofins BioPharma Product Testing, Munich GmbH.

DENTAL RESIN

Permanent Crown

Photopolymer Resin for Form 3B

Permanent Crown Resin is a tooth-colored, ceramic-filled resin for 3D printing of permanent single crowns, inlays, onlays, and veneers. Permanent Crown Resin produces high strength, long term restorations with accurate and precise fitment. Low water absorption and a smooth finish ensure restorations have a low tendency to age, discolor, or accumulate plaque.

Permanent Crown Resin is only validated for use with the Stainless Steel Build Platform.

Permanent Restorations

Onlays

Crowns

Veneers

Inlays



FLPCA201, FLPCA301, FLPCB101, FLPC201

formlabs  | dental

Prepared 10 . 21 . 2020
Rev 01 10 . 21 . 2020

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

PERMANENT CROWN MATERIALS PROPERTIES DATA

VITA¹ CLASSICAL SHADES: A2, A3, B1, C2

Mechanical Properties	Measured Value	Method
Density	1.4 - 1.5 g/cm ³	BEGO Standard
Viscosity	2500 - 6000 MPa*s	BEGO Standard
Flexural Strength (Post cured) ^{2,3,4}	116 MPa	EN ISO 10477, EN ISO 4049
Flexural Modulus (Post Cured)	4090 MPa	EN ISO 10477, EN ISO 4049
Water Solubility	0.23 µg/mm ³	EN ISO 4049
Water Sorption	3.6 µg/mm ³	EN ISO 10477

Permanent Crown Resin is a Medical Device as defined in the Medical Device Directive (93/42/EEC) in the EU and in Section 201(h) of the Federal Food Drug & Cosmetic (FD&C) Act.

Restorations printed with Permanent Crown Resin have been evaluated in accordance with ISO 10993-1:2018, *Biological evaluation of medical devices - Part 1: Evaluation and testing within a risk management process*, and ISO 7405:2009/(R)2015, *Dentistry - Evaluation of biocompatibility of medical devices used in dentistry*, and passed the requirements for the following biocompatibility risks:

ISO Standard	Description ⁵
EN ISO 10993-5:2009	Not cytotoxic
ISO 10993-10:2010/(R)2014	Not an irritant
ISO 10993-10:2010/(R)2014	Not a sensitizer
ISO 10993-3:2014	Not genotoxic
ISO 10993-1:2009	Not toxic

The product was developed and is in compliance with the following ISO Standards:

ISO Standard	Description
EN ISO 13485:2016	Medical Devices – Quality Management Systems – Requirements for Regulatory Purposes
EN ISO 14971:2019	Medical Devices – Application of Risk Management to Medical Devices

¹ VITA is a registered trademark of a company which is not affiliated with Formlabs Inc.

² Material properties may vary based on part geometry, print orientation, print settings, and environmental conditions.

³ Test samples were printed with a Stainless Steel Build Platform on a Form 3B printer with 50 µm Permanent Crown Resin settings. The printed samples were post-processed as recommended in the Instructions for Use.

⁴ Data for post-cured samples were measured on 3 point bending test specimens according to EN ISO 10477 and EN ISO 4049 standards.

⁵ Permanent Crown Resin was tested at Eurofins BioPharma Product Testing, Munich GmbH.

Surgical Guide

Next Generation Material for 3D Printed Surgical Guides

Surgical Guide Resin is an autoclavable, biocompatible resin for applications including 3D printing dental surgical guides for implant placement. Developed specifically for Formlabs printers and rigorously tested with autoclaves, solvents, and implant systems, this material was designed from the ground up to exceed dental demands in part quality, accuracy, and performance.

Surgical guides

Drilling templates

Pilot drill guides

Device sizing templates



FLSGAM01

* May not be available in all regions

formlabs  | dental

Prepared 11 . 04 . 2019
Rev 01 11 . 04 . 2019

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

Material Properties Data

	METRIC	IMPERIAL	METHOD
	Post-Cured ^{1,2}	Post-Cured ^{1,2}	
Tensile Properties			
Ultimate Tensile Strength	73 MPa	11 ksi	ASTM D638-10 (Type IV)
Young's Modulus	2.9 GPa	420 ksi	ASTM D638-10 (Type IV)
Elongation	12.3%	12.3%	ASTM D638-10 (Type IV)
Flexural Properties			
Flexural Strength	103 MPa	15 ksi	ASTM D790-15 (Method B)
Flexural Modulus	2.5 GPa	363 ksi	ASTM D790-15 (Method B)
Hardness Properties			
Hardness Shore D	67 D	67 D	ASTM D2240-15 (Type D)

Disinfection Compatibility	
Chemical Disinfection	70% Isopropyl Alcohol for 5 minutes
Steam Sterilization	Autoclave at 134 °C for 20 minutes Autoclave at 121 °C for 30 minutes

Surgical Guide Resin is a Class I Medical Device as defined in Article I of the Medical Device Directive (93/42/EEC) in the EU and in Section 201(h) of the Federal Food Drug & Cosmetic (FD&C) Act.

Surgical Guide Resin has been evaluated in accordance with ISO 10993-1:2018, Biological evaluation of medical devices - Part 1: Evaluation and testing within a risk management process, and ISO 7405:2009/(R)2015, Dentistry - Evaluation of biocompatibility of medical devices used in dentistry, **and passed the requirements for the following biocompatibility risks:**

ISO Standard	Description ³
EN ISO 10993-5:2009	Not Cytotoxic
ISO 10993-10:2010/(R)2014	Non Irritation
ISO 10993-10:2010/(R)2014	Not a sensitizer

The product was developed and is in compliance with the following ISO Standards:

ISO Standard	Description
EN ISO 13485:2016	Medical Devices – Quality Management Systems – Requirements for Regulatory Purposes
EN ISO 14971:2012	Medical Devices – Application of Risk Management to Medical Devices

NOTES:

¹ Material properties may vary based on part geometry, print orientation, print settings, temperature, and disinfection or sterilization methods used.

² Data for post-cured samples were measured on Type IV tensile bars printed on a Form 2 printer with 100 µm Surgical Guide Resin settings, washed in a Form Wash for 20 minutes in 99 % Isopropyl Alcohol, and post-cured at 60 °C for 30 minutes in a Form Cure.

³ Surgical Guide Resin was tested at NAMS World Headquarters, OH, USA.

DENTAL RESIN

Dental LT Clear (V2)

Biocompatible Photopolymer Resin for Form 2 and Form 3B

Directly print affordable, high-quality occlusal splints in-house with Dental LT Clear Resin (V2). Highly durable and resistant to fracture, this color-corrected material prints clear, polishes to high optical transparency, and resists discoloration over time for a finished appliance you'll be proud to deliver.

Occlusal guards

Splints



FLDLCL02

* May not be available in all regions

formlabs  | dental

Prepared 06 . 09 . 2020
Rev 01 06 . 09 . 2020

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

DENTAL LT CLEAR RESIN (V2) MATERIAL PROPERTIES DATA

Mechanical Properties	METRIC	IMPERIAL	Method
	Post-Cured ^{1,2}	Post-Cured ^{1,2}	
Elongation	12%	12%	ASTM D638-10 (Type IV)
Flexural Strength at 5% Strain	84 MPa	12.2 ksi	ASTM D790-15 (Method B)
Flexural Modulus	2300 MPa	332 ksi	ASTM D790-15 (Method B)
Hardness Shore D	78 D	78 D	ASTM D2240-15 (Type D)

Dental LT Clear Resin (V2) has been evaluated in accordance with ISO 10993-1:2018, *Biological evaluation of medical devices - Part 1: Evaluation and testing within a risk management process*, and ISO 7405:2018, *Dentistry - Evaluation of biocompatibility of medical devices used in dentistry*, and passed the requirements for the following biocompatibility risks:

ISO Standard	Description ³
EN ISO 10993-5:2009	Not cytotoxic
ISO 10993-10:2010/(R)2014	Not an irritant
ISO 10993-10:2010/(R)2014	Not a sensitizer
ISO 10993-11:2017	Not toxic
ISO 10993-3:2014	Not genotoxic

The product was developed and is in compliance with the following ISO Standards:

ISO Standard	Description
EN ISO 13485:2016	Medical Devices – Quality Management Systems – Requirements for Regulatory Purposes
EN ISO 14971:2012	Medical Devices – Application of Risk Management to Medical Devices

¹ Material properties may vary based on part geometry, print orientation, print settings, temperature, and disinfection or sterilization methods used.

² Data were measured on post-cured samples printed on a Form 3B printer with 100 µm Dental LT Clear Resin (V2) settings, washed in a Form Wash for 20 minutes in 99% Isopropyl Alcohol, and post-cured at 60°C for 60 minutes in a Form Cure.

³ Dental LT Clear Resin (V2) was tested at NAMS World Headquarters, OH, USA.

Dental LT Clear (V1)

Biocompatible Material for Splints and Occlusal Guards

Manufacture affordable, high-quality occlusal splints in-house with Dental LT Clear Resin. A Class IIa long-term biocompatible resin with high resistance to fracture, this clear material polishes to high optical transparency for a finished appliance you'll be proud to deliver.



FLDLCL01

* May not be available in all regions

formlabs  | dental

Prepared 10 . 04 . 2017
Rev 01 10 . 04 . 2017

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

Material Properties Data

	METRIC	METHOD
	Post-cured	
Flexural Properties		
Ultimate Flexural Strength	≥ 50 MPa (no break)	ISO 20795-2:2013
Flexural Modulus	≥ 1300 Mpa	ISO 20795-2:2013
Hardness Properties		
Hardness Shore D	80 - 90D	ISO 868:2003
Impact Properties		
Maximum stress intensity factor	≥ 1.1 MPa·m ^{1/2}	ISO 179:2010
Total fracture work	≥ 250 J/m ²	ISO 20795-2:2013

Dental LT Clear is tested at NAMSA, Chasse sur Rhône in France, and is certified biocompatible per EN-ISO 10993-1:2009/AC:2010. Further details are available upon request.

The product is in compliance with ISO Standards:

- EN-ISO 1641:2009
- EN-ISO 10993-1:2009/AC:2010
- EN-ISO 10993-3:2009
- EN-ISO 10993-5:2009
- EN 908:2008

NOTES:

¹Material properties can vary with part geometry, print orientation, print settings, and temperature.

²Data refers to post-cured properties obtained after exposing green parts to 108 watts each of Blue UV-A (315 – 400 nm) and UV-Blue (400 – 550 nm) light, in a heated environment at 80 °C (176 °F), with six (6) 18W/71 lamps (Dulux L Blue) and six (6) 18W/78 lamps (Dulux blue UV-A) for 20 minutes.

Denture Base and Teeth

Truly Accessible Direct Printed Dental Prosthetics

Formlabs is expanding access to digital dentures with an efficient, cost-effective manufacturing solution. Class II long-term biocompatible Digital Denture Resins enable dental professionals to produce 3D printed full dentures accurately and reliably.

Use [Denture Base Resin](#) for denture bases and try-ins.

Use [Denture Teeth Resin](#) for denture teeth.



FLDTA201



FLDBLP01

* May not be available
in all regions

formlabs  | dental

Prepared 01 . 08 . 2019
Rev 01 01 . 08 . 2019

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

Denture Material Properties Data

Denture Teeth (FLDTA201)	METRIC ¹	METHOD
	Postcured ²	
Flexural Strength	> 50 MPa	ISO 10477
Density	1.15 g/cm ³ < X <1.25 g/cm ³	ASTM D792-00

Denture Base (FLDBLP01)	METRIC ¹	METHOD
	Postcured ²	
Flexural Strength	> 65 MPa	ISO 20795-1
Density	1.15 g/cm ³ < X <1.25 g/cm ³	ASTM D792-00

Denture Base and Teeth Resins were tested for biological evaluation of medical devices at WuXi Apptec, 2540 Executive Drive, St. Paul, MN, and is certified biocompatible per EN-ISO 10993-1:2009/ AC:2010:

- Non-mutagenic.
- Non-cytotoxic.
- Not induce erythema or edema reactions.
- Not a sensitizer.
- Not cause systemic toxicity.

Denture Teeth ISO Standard:

- EN-ISO 22112: 2017 (Dentistry – Artificial teeth for dental prostheses)
- Flexural Strength, Water sorption and Water solubility under EN-ISO 10477 (Dentistry – Polymer-based crown and veneering materials) Type 2 and Class 2

Denture Base ISO Standard

- EN-ISO 20795-1:2013 (Dentistry – Base Polymers – Part 1: Denture Base Polymers)

NOTES:


¹ Material properties can vary with part geometry, print orientation, print settings, and temperature.

² Data refers to post-cured properties obtained after exposing green parts to 108 watts each of Blue UV-A (315 – 400 nm), in a heated environment at 80 °C (140 °F) and 1hr, with six (6) 18W/78 lamps (Dulux blue UV-A).

Model Resin

Model Resin for High-Precision, High-Accuracy

Designed for crown and bridge models with removable dies, Model Resin is a high-precision, high-accuracy resin. Print crisp margins and contacts within ± 35 microns, and removable dies with consistently tight fit. A smooth, matte surface finish and color similar to gypsum make it easy to switch from analog to digital model production.

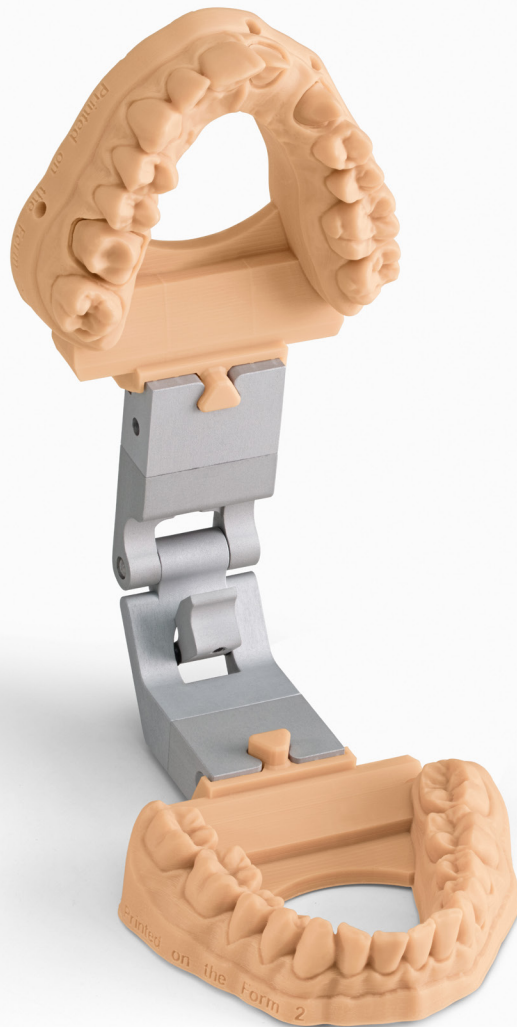

FLDMBE02

* May not be available in all regions

formlabs  | dental

Prepared 02 . 10 . 2017
Rev 01 02 . 10 . 2017

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

Material Properties Data

	METRIC ¹		IMPERIAL ¹		METHOD
	Green ²	Post-Cured ³	Green ²	Post-Cured ³	
Mechanical Properties					
Tensile Strength at Yield	33 MPa	61 MPa	4800 psi	8820 psi	ASTM D 638-14
Tensile Modulus	1.0 GPa	2.7 GPa	230 ksi	397 ksi	ASTM D 638-14
Elongation at Failure	25 %	5 %	25 %	5 %	ASTM D 638-14
Flexural Properties					
Flexural Modulus	0.95 GPa	2.5 GPa	138 ksi	365 ksi	ASTM D 790-15
Flexural Strength at 5% Strain	33.9 MPa	95.8 MPa	4910 psi	13900 psi	ASTM D 790-15
Impact Properties					
Notched IZOD	27 J/m	33 J/m	0.5 ft-lbf/in	0.6 ft-lbf/in	ASTM D256-10
Thermal Properties					
Heat Deflection Temp. @ 264 psi	32.8 °C	45.9 °C	91.1 °F	114.6 °F	ASTM D 648-16
Heat Deflection Temp. @ 66 psi	40.4 °C	48.5 °C	104.7 °F	119.3 °F	ASTM D 648-16

¹Material properties can vary with part geometry, print orientation, print settings, and temperature.

²Data was obtained from green parts, printed using Form 2, 100 µm, Model settings, washed and air dried without post cure.

³Data was obtained from parts printed using Form 2, 100 µm, Model settings, and post-cured with 1.25 mW/cm² of 405 nm LED light for 60 minutes.

Solvent Compatibility

G = Good resistance.

Parts exposed to this solvent should not experience a decrease in mechanical properties. (≤ 1% weight gain, ≤ 1% width increase over 24 hours for a 1 x 1 x 1 cm cube)

X = Unacceptable resistance.

Parts exposed to this solvent will experience a significant decrease in mechanical properties as well as visible degradation. (> 2% weight gain, > 2% width increase over 24 hours for a 1 x 1 x 1 cm cube)


Solvent	Green	Post-Cured	Solvent	Green	Post-Cured
Acetic Acid, 5 %	G	G	Isooctane	G	G
Acetone	X	X	Isopropyl Alcohol	X	G
Bleach, ~5 % NaOCl	G	G	Sodium hydroxide (0.025 %, pH = 10)	G	G
Butyl Acetate	X	G	Salt Water (3.5 % NaCl)	G	G
Diethyl glycol monomethyl ether	X	G	Water	G	G
Hydrogen Peroxide (3 %)	G	G	Xylene	X	G

MATERIALS LIBRARY

Jewelry

High-Detail Materials for Jewelry Design and Manufacturing

Reliably reproduce crisp settings, sharp prongs, smooth shanks, and fine surface detail with Formlabs Jewelry Resins and the world's best-selling desktop stereolithography 3D printers. The Formlabs workflow supports jewelers from design to client try-on to casting, ideal for rapidly expanding custom services and production as your business grows.

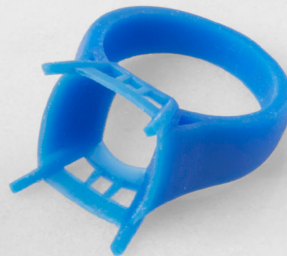

Castable Wax

Sharp Detail and Clean Casting Every Time

A 20% wax-filled photopolymer for reliable casting with zero ash content and clean burnout, Castable Wax Resin accurately captures intricate features and offers the smooth surfaces stereolithography 3D printing is known for.



V1 FLCWPU01

formlabs 

Prepared 07 . 05 . 2018
Rev 01 07 . 05 . 2018

To the best of our knowledge the information contained herein is accurate. However, Formlabs, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

Material Properties Data for Castable Wax FLCWPU - Green¹


	METRIC ¹	IMPERIAL ¹	METHOD
Tensile Properties ²			
Ultimate Tensile Strength	11.6 MPa	1680 psi	ASTM D 638-10
Tensile Modulus	220 MPa	32 ksi	ASTM D 638-10
Elongation at Break	13 %	13 %	ASTM D 638-10
Burnout Properties ²			
Temp @ 5% Mass Loss	249 °C	480 °F	ASTM E 1131
Ash content (TGA)	0.0-0.1%	0.0-0.1%	ASTM E 1131

¹ Material properties can vary with part geometry, print orientation, print settings, and temperature.

² Data was obtained from parts printed using Form 2, Castable 50 µm Fine Detail settings and washed without post-cure.

Standard Burnout Schedule

The Standard Burnout Schedule is designed to provide the maximum possible investment strength and complete burnout of the finest details using R&R Plasticast or similar investment materials. Use this schedule as a starting point and make adjustments as needed.

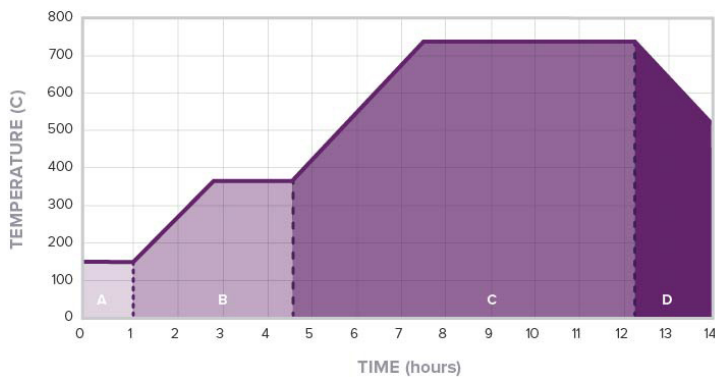

Post-Curing Info:

No post-cure required.

	PHASE	TIME	SCHEDULE °C	SCHEDULE °F
A	Insert Flasks	0 min	150 °C	302 °F
	Hold	60 min	150 °C	302 °F
B	Ramp	100 min	2.2 °C / min	4 °F / min
	Hold	120 min	371 °C	700 °F
C	Ramp	180 min	2.0 °C / min	3.6 °F / min
	Hold	280 min	732 °C	1350 °F
D	Ramp	100 min	- 2.2 °C / min	- 4 °F / min
	Hold (casting window)	Up to 2 hours	512 °C or casting temp	954 °F or casting temp

Castable

Original Formulation for Direct Investment Casting

This pure polymer requires an alternate burnout to a typical wax schedule.
Post-curing recommended.



FLCABL02



Castable Material Properties Data


	METRIC ¹	IMPERIAL ¹	METHOD
Mechanical Properties ²			
Tensile Strength at Break	11.6 MPa	1680 psi	ASTM D 638-10
Tensile Modulus	220 MPa	32 ksi	ASTM D 638-10
Elongation at Failure	13 %	13 %	ASTM D 638-10

¹ Material properties can vary with part geometry, print orientation, print settings, and temperature.

² Data was obtained from parts printed using Form 2, Castable 50 µm Fine Detail settings, and post-cured with 2.5 mW/cm² of fluorescent bulb UV light, centered at 405 nm.

Recommended Burnout Curve

We specifically recommend Plasticast with BANDUST. If seeking alternatives, look for investments advertised to work with photopolymers. Customers have reported success with Kerr SatinCast and Omega+ by Goldstar Powders. You can also experiment with bonded investments, like those typically used for dental applications. Some casting houses have also developed proprietary investments.

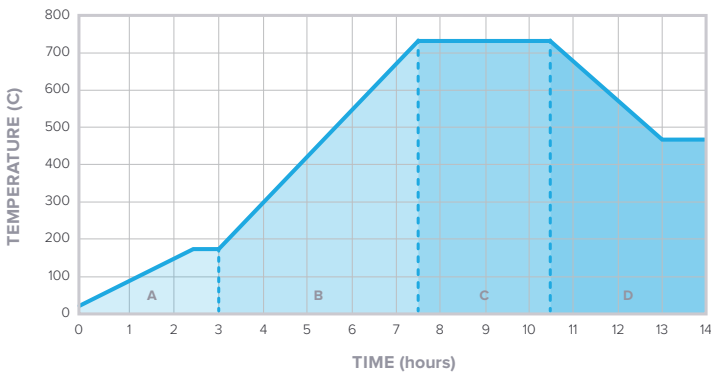

Post-Curing Info:

Formlabs recommends post-curing Castable Resin parts for 280 minutes at 45 °C.

	PHASE	TIME	SCHEDULE °C	SCHEDULE °F
	Insert Flasks	0 min	Room temp	Room temp
A	Ramp	150 min	1.0 °C / min	1.9 °F / min
	Hold	30 min	177 °C	350 °F
B	Ramp	270 min	2.1 °C / min	3.7 °F / min
	Hold	180 min	732 °C	1350 °F
C	Ramp	150 min	- 1.7 °C / min	- 3.0 °F / min
	Hold (casting window)	Up to 2 hours	482 °C or desired casting temp	900 °F or desired casting temp

Ceramic

An Experimental Material for Engineering, Art, and Design


Parts 3D printed in silica-filled Ceramic Resin can be fired to create a fully ceramic piece. This experimental Form X material requires more trial and error than other Formlabs products. Please read the usage guide prior to printing.

Technical experimentation

Fine art and sculpture

Research and development

Jewelry

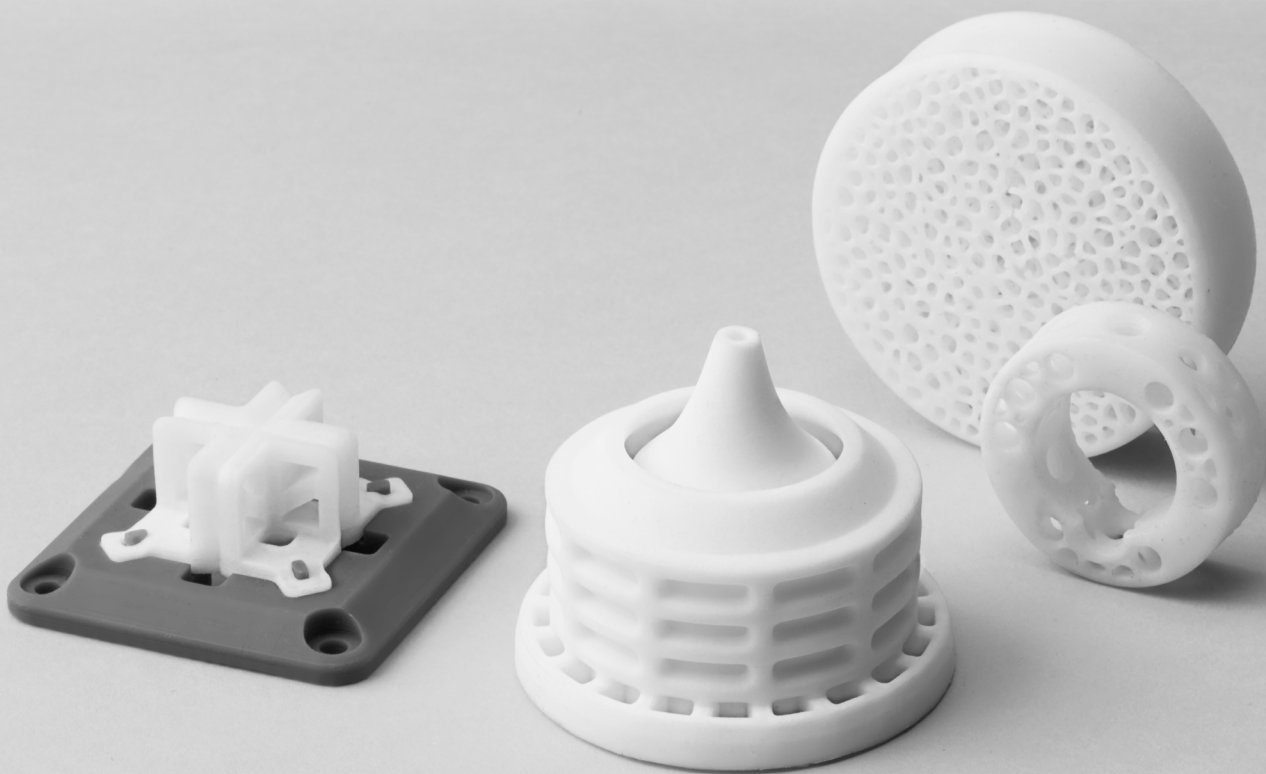

FLCEWH01

* May not be available in all regions



Material Properties Data

GREEN ¹	METRIC ²	IMPERIAL ²	METHOD
Tensile Properties			
Ultimate Tensile Strength	51 MPa	740 psi	ASTM D638-14
Tensile Modulus	1 GPa	149 ksi	ASTM D638-14
Elongation	1.4 %	1.4 %	ASTM D638-14
Flexural Properties			
Flexural Stress at Break	10.3 MPa	1489 psi	ASTM D790-15e2
Flexural Modulus	995 MPa	144 ksi	ASTM D790-15e2
Impact Properties			
Notched IZOD	18.4 J/m	0.35 ft-lb/in	ASTM D256-10e1
Thermal Properties			
Heat Deflection Temp. @ 1.8 MPa	75 °C	155 °F	ASTM D648-16, Method B
Heat Deflection Temp. @ 0.45 MPa	> 290 °C	> 554 °F	ASTM D648-16, Method B

FIRED ³	METRIC ²	IMPERIAL ²	METHOD
Tensile Properties			
Tensile Modulus	5.1 GPa	740 ksi	ASTM D638-14
Flexural Properties			
Flexural Stress at Break	10.3 MPa	1489 psi	ASTM D790-15e2
Thermal Properties			
Heat Deflection Temp. @ 1.8 MPa	75 °C	155 °F	ASTM D648-16, Method B
Heat Deflection Temp. @ 0.45 MPa	> 290 °C	> 554 °F	ASTM D648-16, Method B

¹Data was obtained from green parts, printed using Form 2, 100 µm, Ceramic settings, washed, air dried, and post-cured in Form Cure at 60 °C for 60 minutes.

²Material properties can vary with part geometry, print orientation, print settings and temperature.

³Data was obtained from fired parts, printed using Form 2, 100 µm, Ceramic settings, which were washed, dried and post-cured in Form Cure at 60 °C for 60 minutes. Parts had been printed with a pre-applied scale factor and fired using a 30 hr schedule to a maximum firing temperature of 1275 °C as laid out in the [Formlabs usage guide](#).

Rebound

Rebound Resin: Production-Ready Elastic 3D Printing Material

With five times the tear strength, three times the tensile strength, and two times the elongation of other production-grade elastomeric materials on the market, Rebound Resin is perfect for 3D printing springy, resilient parts.

End-use production

Gaskets, seals, and grommets


Compliant robotics

Custom cases

Handles, grips, and overmolds

Complex geometries

This material is available exclusively through partnership with Formlabs and requires a minimum quantity commitment to get started. After you contact us, you'll have the opportunity to request a standard sample, purchase a run of custom samples to evaluate, and finally, buy a turnkey package of the equipment needed to print in Rebound Resin at your facility. consulting@formlabs.com

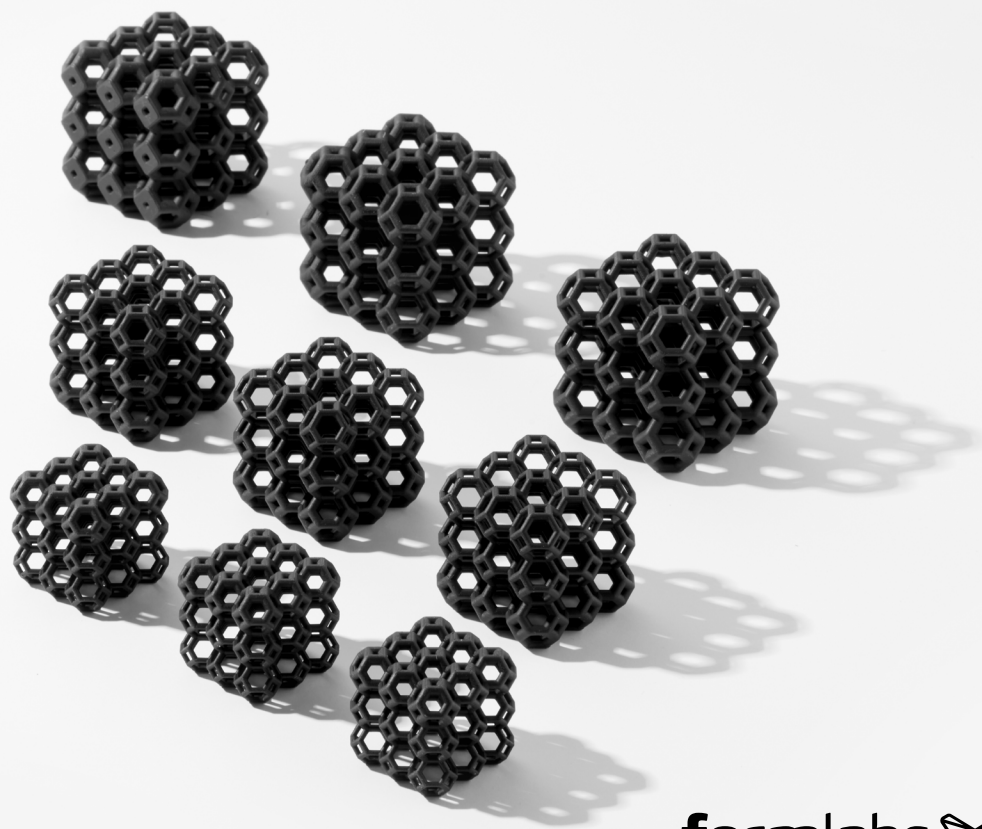

FLRBBL01



Material Properties Data Metric

	METRIC ¹	IMPERIAL ¹	METHOD
	Post-Cured	Post-Cured	
Mechanical Properties			
Ultimate Tensile Strength	22 MPa	3,391 psi	ASTM D 412-06 (A)
Modulus at 50% Elongation	3.46 MPa	501.83 psi	ASTM D 412-06 (A)
Elongation at Break	300 %		ASTM D 412-06 (A)
Compression set at 25 °C for 22 hrs	16 %		ASTM D 395-03 (B)
Compression set at 70 °C for 22 hrs	40 %		ASTM D 395-03 (B)
Tear Strength	110 kN/m	0.628 lbf/in	ASTM D 624-00
Hardness, Shore A	86 A		ASTM D 2633
Bayshore Rebound Resilience	57 %		ASTM D 2633
Abrasion	101 mm ³		ISO 4649, 40 rpm, 10 N load
Ross Flexing Fatigue	> 50,000 cycles (no crack propagation)		ASTM D1052, (notched), 23 °C, 60 degree bending, 100 cycles/minute
Ross Flexing Fatigue	> 50,000 cycles (no crack propagation)		ASTM D1052, (notched) -10 °C, 60 degree bending, 100 cycles/minute
Dielectric Properties			
Dielectric Constant	7.7		ASTM D150, 1MHz
Dissipation Factor	0.069		ASTM D150, 1MHz
Temperature Properties			
Glass Transition Temperature	-50 °C	-58 °F	DSC

¹Material properties can vary with part geometry, print orientation, print settings, and temperature.

Solvent Compatibility

Percent weight gain over 24 hours for a printed and post-cured 1 x 1 x 1 cm cube immersed in respective solvent:

Solvent	24 hr weight gain (%)	Solvent	24 hr weight gain (%)
Water	9	Dichloromethane	367
Salt Water	7	Propylene Glycol Diacetate	9
Isopropyl Alcohol	8	Diethylene Glycol Monomethyl Ether	16
Acetone	37	Mineral Oil (Light)	< 1
Hexane	1	Castor Oil	< 1
Butyl Acetate	26	Hydraulic Oil	< 1

Form Wash + Form Cure

Stronger Parts, Less Effort



AUTOMATE CLEANING WITH FORM WASH

Form Wash automatically cleans uncured liquid resin from 3D printed parts' surfaces, getting every nook and cranny perfectly clean.



POST-CURING SIMPLIFIED WITH FORM CURE

Form Cure precisely controls temperature and light to bring parts to their maximum mechanical properties.

Contact your nearest reseller to configure your perfect 3D printing ecosystem.

